

TRMM SCIENCE USER - INTERFACE CONTROL SPECIFICATION (ICS)  
TSDIS.MDL-02.5

# **TROPICAL RAINFALL MEASURING MISSION SCIENCE DATA AND INFORMATION SYSTEM**

## **Interface Control Specification Between the Tropical Rainfall Measuring Mission Science Data and Information System (TSDIS) and the TSDIS Science User (TSU)**

**TSDIS-P907**

### **Volume 4: File Specifications for TRMM Products - Level 2 and Level 3**

**Release 5.22**

Prepared for:

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION  
GODDARD SPACE FLIGHT CENTER  
Code 902  
Greenbelt, Maryland 20771

December 02, 2005

## CHANGE RECORD HISTORY

**Document Name:** Interface Control Specification Between the TSDIS and the TSDIS Science User (TSU), Volume 4; File Specifications for TRMM Products - Levels 2 and 3

**Document Number:** TSDIS-MDL-02.

Revision Number	Effective Date	CCR Number	Description of Changes
Version 1	7/31/95	N/A	Draft Release
Version 2	8/31/95	N/A	Baseline Release
Version 3	6/28/96	Not Available	Update file specifications from Version 2 Algorithm
Version 4	9/22/98	174, 176, 178, 192-194, 221, 228, 245,251,258, 262, 265, 270, 277, 279, 283, 284, 265, 288, 290, 295, 300-304, 307-310	Update file specifications from Version 3 Algorithm
Version 5	11/10/99	316, 320, 321, 322, 325, 327, 339 (Volume 4 release 6.05 revision also applies to release 5 for PR 2A25 scaling factor for averaged rain rate)	Update file specifications from Version 4 Algorithm, /Corrections made to specifications, /Udpate rain rate - /corrected Z factor, /Updated Near Surface Rain and Near Suface Z specifications. Update/correction text change to 2A25 Algorithm Figure 1.2.3-1 and other correction. PR 2A25 scaling factor for averaged rain rate was corrected (changed from 10 to 100)


## TABLE OF CONTENTS

	<u>Page</u>
<b>1. LEVEL 2 PRODUCTS.....</b>	<b>1-1</b>
<b>1.1 TRMM MICROWAVE IMAGER (TMI) .....</b>	<b>1-1</b>
1.1.1 2A-12 - TMI Profiling.....	1-1
<b>1.2 Precipitation Radar (PR) .....</b>	<b>1-5</b>
1.2.1 2A-21 - Surface Cross Section.....	1-5
1.2.2 2A-23 - PR Qualitative.....	1-8
1.2.3 2A-25 - PR Profile .....	1-16
<b>1.3 TMI And PR Combined.....</b>	<b>1-24</b>
1.3.1 2B-31 - TRMM Combined.....	1-24
<b>1.4 GV Radar.....</b>	<b>1-29</b>
1.4.1 2A-52 - Existence.....	1-29
1.4.2 2A-53 - Radar Site Rain Map.....	1-31
1.4.3 2A-54 - Radar Site Convective/Stratiform Map .....	1-32
1.4.4 2A-55 - Radar Site 3-D Reflectivities.....	1-33
<b>2. LEVEL 3 PRODUCTS.....</b>	<b>2-1</b>
<b>2.1 TRMM Microwave Imager (TMI) .....</b>	<b>2-1</b>
2.1.1 3A-11 - TMI Emission .....	2-1
<b>2.2 Precipitation Radar (PR) .....</b>	<b>2-3</b>
2.2.1 3A-25 - PR Rainfall .....	2-5
2.2.2 3A-26 - Surface Rain .....	2-25
<b>2.3 TMI And PR Combined.....</b>	<b>2-27</b>
2.3.1 3B-31 - Rainfall Combined.....	2-27
<b>2.4 TRMM and Others Combined .....</b>	<b>2-30</b>
2.4.1 3B-42 - TRMM and Others GPI Calibration .....	2-30
2.4.2 3B-43 - TRMM and Others Data Sources.....	2-31
<b>2.5 GV Radar.....</b>	<b>2-32</b>
2.5.1 3A-53 - 5-Day Site Rain Map.....	2-32
2.5.2 3A-54 - Site Rainfall Map.....	2-33
2.5.3 3A-55 - Monthly 3-D Structure.....	2-34
<b>2.6 Other Validation Data .....</b>	<b>2-36</b>
2.6.1 3A-46 - SSM/I Rain .....	2-36
<b>3. ACRONYMS.....</b>	<b>3-1</b>
<b>4. GLOSSARY.....</b>	<b>4-1</b>

## LIST OF FIGURES

<u>Figure</u>	<u>Page</u>
1.1.1-1	Data Format Structure for 2A-12, TMI Profiling ..... 1-2
1.2.1-1	Data Format Structure for 2A-21, Surface Cross Section ..... 1-6
1.2.2-1	Data Format Structure for 2A-23, PR Qualitative ..... 1-10
1.2.3-1	Data Format Structure for 2A-25, PR Profile ..... <b>Error! Bookmark not defined.</b>
1.3.1-1	Data Format Structure for 2B-31, TRMM Combined ..... 1-25
1.4.1-1	Example of 2A-52, Existence. .... 1-30
1.4.2-1	Data Format Structure for 2A-53, Radar Site Rain Map. .... 1-31
1.4.3-1	Data Format Structure for 2A-54, Radar Site Convective/Stratiform Map ..... 1-32
1.4.4-1	Data Format Structure for 2A-55, Radar Site 3-D Reflectivity ..... 1-33
2.1.1-1	Data Format Structure for 3A-11, TMI Emission..... 2-2
2.2.1-1	Data Format Structure for 3A-25, PR Rainfall ..... 2-7
2.2.2-1	Data Format Structure for 3A-26, Surface Rainfall..... 2-25
2.3.1-1	Data Format Structure for 3B-31, Rainfall Combined..... 2-28
2.4.1-1	Data Format Structure for 3B-42, TRMM and Others GPI Calibration..... 2-30
2.4.2-1	Data Format Structure for 3B-43, TRMM and Other Data Sources..... 2-31
2.5.1-1	Data Format Structure for 3A-53, 5-Day Site Rain Map..... 2-33
2.5.2-1	Data Format Structure for 3A-54, Site Rainfall Map. .... 2-34
2.5.3-1	Data Format Structure for 3A-55, Monthly 3-D Structure. .... 2-34
2.6.1-1	Data Format Structure for 3A-46, SSM/I Rain. .... 2-36

## LIST OF TABLES

<u>Table</u>	<u>Page</u>
1.1.1-1	2A-12 Scan Time ..... 1-3
1.2.1-1	2A-21 Scan Time ..... 1-7
1.2.2-1	2A-23 Scan Time ..... 1-9
1.2.3-1	2A-25 Clutter Flags ..... 1-18
1.2.3-2	2A-25 Scan Time ..... 1-18
1.3.1-1	2B-31 Scan Time ..... 1-26
1.4.2-1	2A-53 Time ..... 1-32
1.4.3-1	2A-54 Time ..... 1-33
1.4.4-1	2A-55 Time ..... 1-34
2.6.1-1	3A-46 GridStructure Fields ..... 2-37

This is the fourth volume of the TSDIS - TSU ICS. This volume specifies Level 2 and Level 3 file formats. It was written based on the TRMM Science Requirements, Version 1 and 2 algorithm descriptions and personal communications with the algorithm developers. It has been updated using communications with algorithm developers.

The sections that specify the metadata will change as the TSDIS metadata are defined. Currently, all Level 2 and 3 products use the Hierarchical Data Format (HDF) except 2A-52, which is in ASCII format. Level 2 satellite data products use the EOSDIS Swath Structure. Level 3 satellite data products use the EOSDIS Planetary Grid Structure. Level 2 and 3 Ground Validation (GV) radar data products use the TSDIS-defined Radar Grid Structure, except for 2A-52. The explanations of the HDF, Swath Structure, Planetary Grid Structures and Radar Grid Structure are given in Section 2 of Volume 3 of the TSDIS -TSU ICS, which is the Level 1 File Specifications. The formatting conventions, including values for missing data, are described in Section 3 of Volume 3 of the TSDIS -TSU ICS.

## **1. LEVEL 2 PRODUCTS**

Level 2 products are instantaneous rainfall and surface cross section products retrieved from Level 1 data. There are 11 Level 2 TRMM products for satellite data and ground validation (GV) data. For satellite data, only the TRMM Microwave Imager (TMI) and Precipitation Radar (PR) have Level 2 data products; there is no Level 2 data product for the Visible and Infrared Scanner (VIRS). Ground validation data include GV radar data and data from rain gauges and disdrometers, which are located at the same sites as the GV radars.

### **1.1 TRMM MICROWAVE IMAGER (TMI)**

There is only one Level 2A data product for TMI, 2A-12 — TMI Profiling (PI: Dr. Christian Kummerow). The granule size is one orbit plus 50 scan lines of pre-orbit overlap and 50 scan lines of post-orbit overlap. The following parameters are used in describing the formats:

- nscan: the number of scans within one granule (See ICS Volume 3 Section 3-6).
- npixel: the number of high resolution pixels within one scan line (208).
- nlayer: the number of profiling layers within one pixel (14).
- ngeo: the number of geolocation data (2).

#### **1.1.1 2A-12 - TMI Profiling**

2A-12, “TMI Profiling”, generates vertical hydrometeor profiles on a pixel by pixel basis. For each pixel, cloud liquid water, precipitation water, cloud ice water, precipitation ice, and latent heating are given at 14 vertical layers. The surface rainfall and the associated confidence indicator will also be computed. The format of this product is designed in consultation with the TMI algorithm scientists. Figure 1.1.1-1 shows the structure of the 2A-12 product in terms of the component objects and sizes.

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):


ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**SwathStructure** (Attribute, 5000-byte character):

SwathStructure gives the specification of the swath geometry. See Section 2 in Volume 3 of ICS, Level 1 File Specifications.

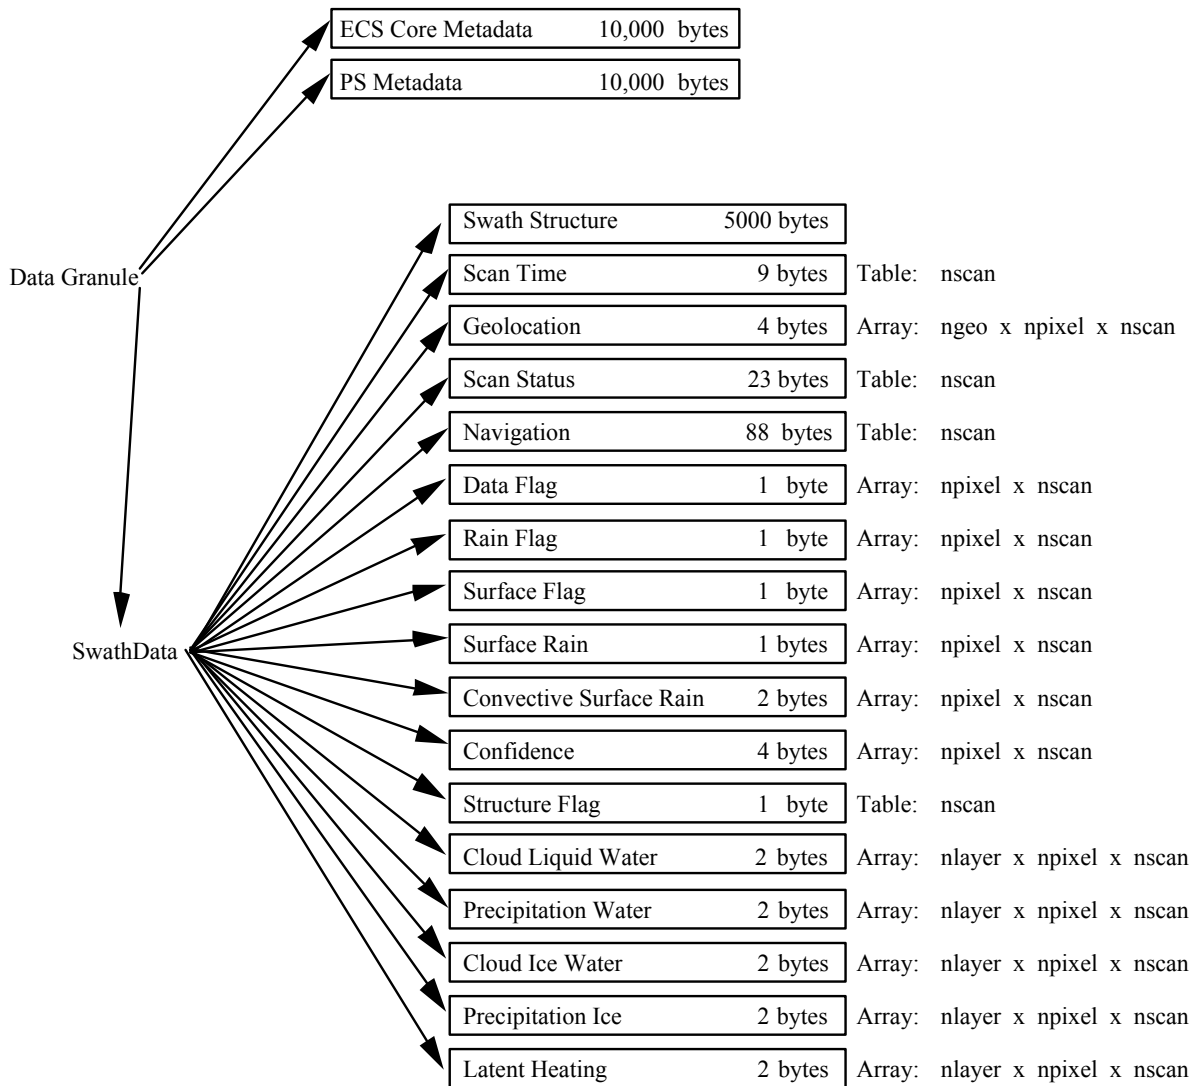

**Figure 1.1.1-1**  
**Data Format Structure for 2A-12, TMI Profiling**



**Scan Time** (Vdata Table, record size 9 bytes, nscan records):

The Scan Time is the time associated with each scan. Table 1.1.1-1 gives the description of the content and format. The exact relationship between the Scan Time and the time of each IFOV is described in ICS Volume 3, section 3.

**Table 1.1.1-1  
 2A-12 Scan Time**

Name	Format	Description
Year	2-byte integer	4-digit year, e.g., 1998
Month	1-byte integer	The month of the Year
Day of Month	1-byte integer	The day of the Month
Hour	1-byte integer	The hour (UTC) of the Day
Minute	1-byte integer	The minute of the Hour
Second	1-byte integer	The second of the Minute
Day of Year	2-byte integer	The day of the Year

**Geolocation** (SDS, array size ngeo x npixel x nscan, 4-byte float):

The earth location of the center of the IFOV at the altitude of the earth ellipsoid. The first dimension is latitude and longitude, in that order. The next dimensions are numbers of pixels and scans. Values are represented as floating point decimal degrees. Off-earth is represented as -9999.9. Latitude is positive north, negative south. Longitude is positive east, negative west. A point on the 180° meridian is assigned to the western hemisphere.

**Scan Status** (Vdata, record size 21 bytes, nscan records):

The status of each scan is represented in terms of quality, platform and instrument control data, and fractional orbit number. See the description of the 1B-11 Scan Status in the ICS Volume 3. All bytes in the Scan Status are copied from the 1B-11 Scan Status including the Missing byte. 2A-12 should reset the Missing byte if it determines data is missing or there is no-rain.

**Navigation** (Vdata Table, record size 88 bytes, nscan records):

See Appendix B in Volume 3 of ICS, Level 1 File Specifications

**Data Flag** (SDS, array size npixel x nscan, 1-byte integer):

The Data Flag indicates the quality of data. Values greater than or equal to zero indicate good data quality. Values less than zero indicate bad data quality. Specific values are:

- 0 Good data quality
- 9 Channel brightness temperature outside valid range
- 15 The neighboring 5 x 5 pixel array is incomplete due to edge or bad data quality
- 21 Surface type invalid
- 23 Date time invalid
- 25 Latitude or longitude invalid

**Rain Flag** (SDS, array size npixel x nscan, 1-byte integer):

The Rain Flag indicates if rain is possible. If the value is greater than or equal to zero rain is possible. If the value is less than zero the pixel has been pre-screened as non-raining; the exact value is used to identify the screen itself.

**Surface Flag** (SDS, array size npixel x nscan, 1-byte integer):

The Surface Flag indicates the type of surface and has the following values:

- 0: ocean;
- 1: land;
- 2: coast;
- 3: other.

**Surface Rain** (SDS, array size npixel x nscan, 4-byte float):

The Surface Rain is the instantaneous rain rate ( $\text{mm h}^{-1}$ ) at the surface for each pixel. It ranges between 0.0 and 3000.0 mm/h.

**Convective Surface Rain** (SDS, array size npixel x nscan, 4-byte float):

The Convective Surface Rain is the instantaneous convective rain rate ( $\text{mm h}^{-1}$ ) at the surface for each pixel. It ranges between 0.0 and 3000.0 mm/h.

**Confidence** (SDS, array size npixel x nscan, 4-byte float):

The Confidence is that associated with the surface rain. It is measured as an rms deviation in temperatures with units in degrees (K). The data range is 0.0 to 300.0K

The following five variables represent profiled quantities at 14 layers. The top of each layer is given at 0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10.0, 14.0, and 18.0 km above the surface.

**Cloud Liquid Water** (SDS, array size nlayer x npixel x nscan, 2-byte integer):

This is the cloud liquid water content for each pixel at 14 layers. It ranges from 0.00 to 10.00  $\text{g m}^{-3}$  and is multiplied by 1000 and stored as a 2-byte integer.

**Precipitation Water** (SDS, array size nlayer x npixel x nscan, 2-byte integer):

This is the precipitation water content for each pixel at 14 layers. It ranges from 0.00 to 10.00  $\text{g m}^{-3}$  and is multiplied by 1000 and stored as a 2-byte integer.

**Cloud Ice Water** (SDS, array size nlayer x npixel x nscan, 2-byte integer):

This is the cloud ice water content for each pixel at 14 layers. It ranges from 0.00 to 10.00  $\text{g m}^{-3}$  and is multiplied by 1000 and stored as a 2-byte integer.

**Precipitation Ice** (SDS, array size nlayer x npixel x nscan, 2-byte integer):

This is the precipitation content for each pixel at 14 layers. It ranges from 0.00 to 10.00  $\text{g m}^{-3}$  and is multiplied by 1000 and stored as a 2-byte integer.

**Latent Heating** (SDS, array size nlayer x npixel x nscan, 2-byte integer):

This is the latent heating release (°C/day) for each pixel at 14 layers. It is multiplied by 10 and stored as a 2-byte integer. Ranges are -256 deg/hour to 256 deg/hour.


## 1.2 PRECIPITATION RADAR (PR)

There are three level 2A products for PR, 2A-21 — Surface Cross Section (PI: Dr. Robert Meneghini), 2A-23 — PR Qualitative (PI: Dr. Jun Awaka), and 2A-25 — PR Profile (PI: Dr. Toshio Iguchi). The formats of these products are based on the Version 2 algorithm descriptions and consultation with PR algorithm scientists. The granule sizes for all Level 2 PR products are one orbit. The following parameters are used in describing the formats:

- nscan: the number of PR scans within one granule (See ICS Volume 3 Section 3-6).
- nray: the number of rays within one PR scan line (49).
- ngeo: the number of geolocation data (2).
- ncell1: the number of radar range cells at which the rain rate is estimated (80). The cells range from cell 0 to cell 79. Each cell is 250 m apart, with cell 79 at the earth ellipsoid.
- ncell2: the number of radar range cells at which the Z-R parameters are output (5).
- nmeth: the number of methods used (2).

### 1.2.1 2A-21 - Surface Cross Section

2A-21, “Surface Cross Section,” computes the normalized surface cross section. If rain is present, it will also compute path attenuation and its associated reliability factor. Figure 1.2.1-1 shows the structure of the 2A-21 product in terms of the component objects and their sizes.

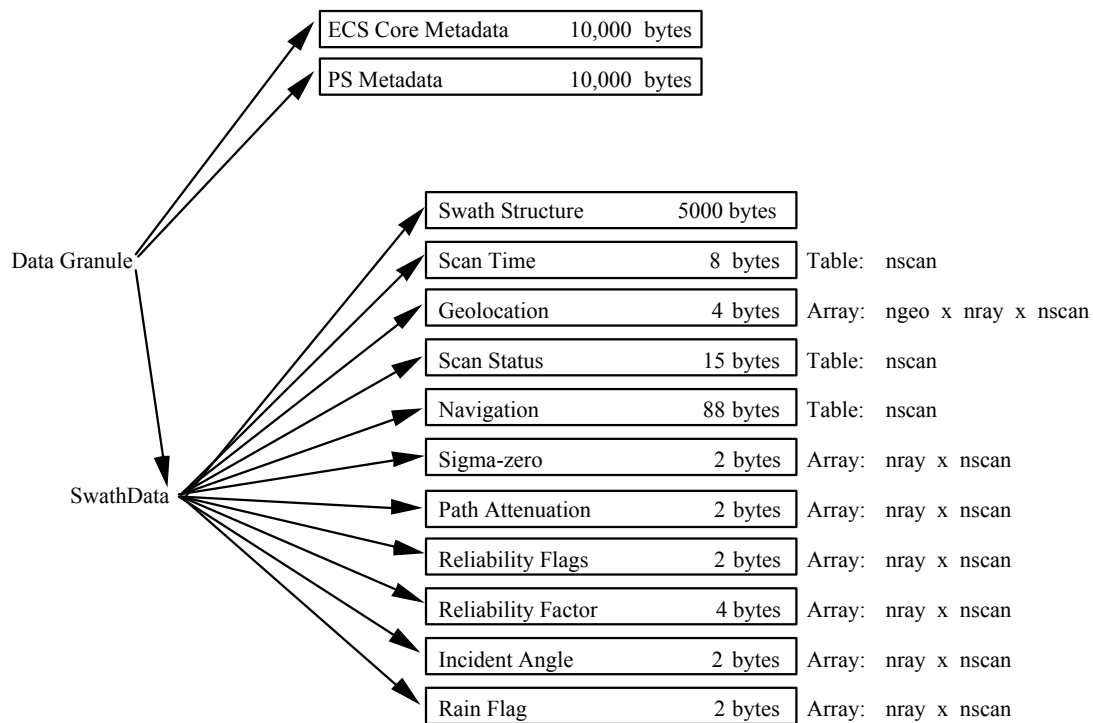

**Figure 1.2.1-1**  
**Data Format Structure for 2A-21, Surface Cross Section**

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**SwathStructure** (Attribute, 5000-byte character):

SwathStructure gives the specification of the swath geometry. See Section 2 in Volume 3 of ICS, Level 1 File Specifications.

**Scan Time** (Vdata Table, record size 8 bytes, nscan records):

See the following Table 1.2.1-1.

**Table 1.2.1-1**

## 2A-21 Scan Time

Name	Format	Description
Scan Time	8-byte float	A time associated with the scan. The exact relationship between the Scan Time and the time of each IFOV is described in ICS Volume 3, section 3. Scan Time is expressed as the UTC seconds of the day.

**Geolocation** (SDS, array size ngeo x nray x nscan, 4-byte float):

The earth location of the center of the IFOV at the altitude of the earth ellipsoid. The first dimension is latitude and longitude, in that order. The next dimensions are numbers of pixels and scans. Values are represented as floating point decimal degrees. Off-earth is represented as -9999.9. Latitude is positive north, negative south. Longitude is positive east, negative west. A point on the 180° meridian is assigned to the western hemisphere.

**Scan Status** (Vdata Table, record size 15 bytes, nscan records):

The status of each scan is represented in terms of quality, platform and instrument control data, and fractional orbit number. See the description of the 1B-21 Scan Status in the ICS Volume 3. All bytes in Scan Status are copied from the 1B-21 Scan Status including the Missing byte. 2A-21 should reset the Missing byte if it determines data is missing or there is no-rain.

**Navigation** (Vdata Table, record size 88 bytes, nscan records):

See Appendix B in Volume 3 of ICS, Level 1 File Specifications

**Sigma-zero** (SDS, array size nray x nscan, 2-byte integer):

The Sigma-zero is the normalized surface cross section. It ranges from -50.00 to 20.00 dB and is multiplied by 100 and stored as a 2-byte integer.

**Path Attenuation** (SDS, array size nray x nscan, 2-byte integer):

This is the estimate of positive 2-way integrated attenuation dB when rain is present. It ranges from 0.00 to 50.00 dB and is multiplied by 100 and stored as a 2-byte integer.

**Reliability Flags** (SDS, array size nray x nscan, 2-byte integer):

Reliability Flags holds various information in the form of single digit integer flags. The 2-byte integer is expressed in the form vwxyz where v, w, x, y, and z are integers between 0 and 9 (v must be 0, 1, or 2). Each digit has the following definition:

v = 1 (no rain along path)

= 2 (rain along path)

w = 1 (PIA estimate is reliable)

= 2 (PIA estimate is marginally reliable)

= 3 (PIA estimate is unreliable)

= 4 (PIA estimate provides a lower bound to the path-attenuation)

= 9 (no-rain case)

x = 1 (spatial surface reference is used to estimate PIA)  
= 2 (temporal surface reference is used to estimate PIA)  
= 3 (neither exists - i.e. insufficient # of data points)  
= 4 (unknown background type)  
= 5 (no-rain case & low signal to noise ration - do not update  
temporal or spatial SRs)  
= 9 (no-rain case)

y = 1 (surface tracker locked - central angle bin)  
= 2 (surface tracker unlocked - central angle bin)  
= 3 (peak surface return at normally-sampled gate - outside  
central swath)  
= 4 (Peak surface return not at normally-sampled gate - outside  
central swath)

z = 0 (ocean)  
= 1 (land)  
= 2 (coast)  
= 3 (OLC unknown or of a category other than those above or 'mixed' type)

Note: for missing data set reliabFlag = -9999

**Reliability Factor** (SDS array size nray x nscan, 4-byte float):

The Reliability Factor is the ratio of the estimated value of path attenuation to the standard deviation associated with the mean value of the reference estimate. This ratio ranges from 0 to 100 and is unitless.

**Incident Angle** (SDS, array size nray x nscan, 2-byte integer):

The Incident Angle is the angle, in degrees, between the PR nadir and the radar beam. It ranges from -30.0 to +30.0 degrees and is multiplied by 10 and stored as a 2-byte integer.

**Rain Flag** (SDS, array size nray x nscan, 2-byte integer):

The Rain Flag has the following values:

- 0: no rain;
- 1: rain present.

**1.2.2 2A-23 - PR Qualitative**

2A-23, "PR Qualitative", produces a Rain/No-rain flag. If rain is present, this algorithm will detect the bright band, determine the heights of the bright band and the storm, and classify rain types. Figure 1.2.2-1 shows the structure of the 2A-23 product in terms of the component objects and their sizes.

**Scan Time** (Vdata Table, record size 8 bytes, nscan records):  
 See the following Table 1.2.2-1.

**Table 1.2.2-1**  
**2A-23 Scan Time**


Name	Format	Description
Scan Time	8-byte float	A time associated with the scan. The exact relationship between the Scan Time and the time of each IFOV is described in ICS Volume 3, section 3. Scan Time is expressed as the UTC seconds of the day.

**Geolocation** (SDS, array size ngeo x nray x nscan, 4-byte float):

The earth location of the center of the IFOV at the altitude of the earth ellipsoid. The first dimension is latitude and longitude, in that order. The next dimensions are numbers of pixels and scans. Values are represented as floating point decimal degrees. Off-earth is represented as -9999.9. Latitude is positive north, negative south. Longitude is positive east, negative west. A point on the 180° meridian is assigned to the western hemisphere.

**Scan Status** (Vdata Table, record size 15 bytes, nscan records):

The status of each scan is represented in terms of quality, platform and instrument control data, and fractional orbit number. See the description of the 1B-21 Scan Status in the ICS Volume 3. All bytes in Scan Status are copied from the 1B-21 Scan Status including the Missing byte. 2A-23 should reset the Missing byte if it determines data is missing or there is no-rain.

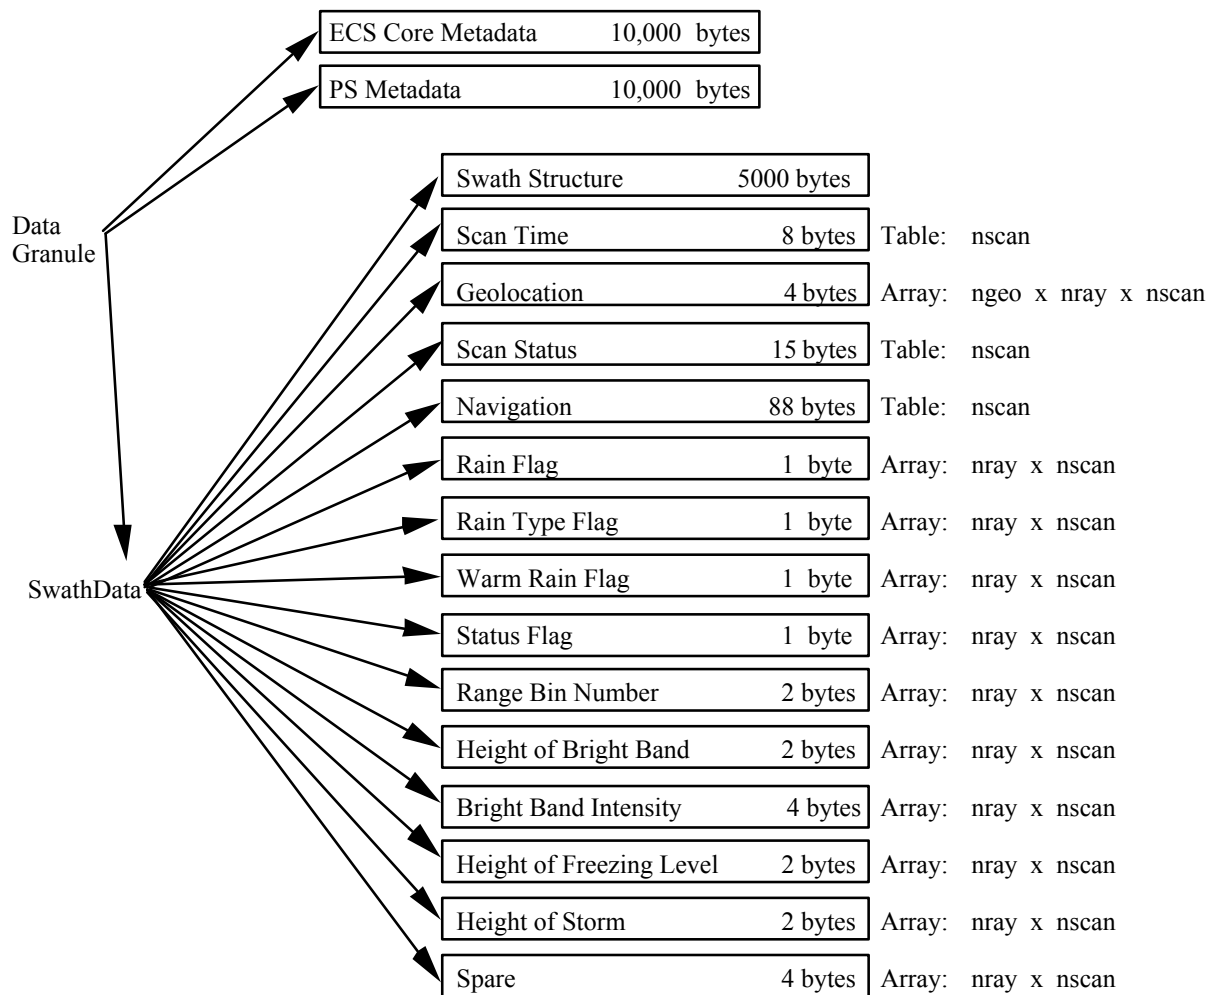

**Figure 1.2.2-1**  
**Data Format Structure for 2A-23, PR Qualitative**

**Navigation** (Vdata Table, record size 88 bytes, nscan records):  
 See Appendix B in Volume 3 of ICS, Level 1 File Specifications

**Rain Flag** (SDS, array size nray x nscan, 1-byte integer):  
 The Rain Flag is identical to the Minimum Echo Flag of 1C21:

- 0: no rain
- 10: rain possible
- 11: rain possible (echo greater than rain threshold #1 in clutter region)
- 12: rain possible (echo greater than rain threshold #2 in clutter region)
- 20: rain certain



**Rain Type Flag** (SDS, array size nray x nscan, 1-byte integer):

The Rain Type Flag is set as follows:

- 10: Stratiform certain.  
When R\_type\_V = T\_stra; (BB exists)  
and R\_type\_H = T\_stra;
- 11: Stratiform certain.  
When R\_type\_V = T\_stra; (BB exists)  
and R\_type\_H = T\_others;
- 12: Probably stratiform.  
When R\_type\_V = T\_others;  
and R\_type\_H = T\_stra;
- 13: Maybe stratiform.  
When R\_type\_V = T\_stra; (BB detection certain)  
and R\_type\_H = T\_conv;
- 14: Maybe stratiform or maybe transition or something else.  
When R\_type\_V = T\_others; (BB hardly expected)  
and R\_type\_H = T\_stra;
- 15: Maybe stratiform.  
Shallow isolated (type of warm rain) is detected  
When R\_type\_V = T\_others;  
R\_type\_H = T\_stra;  
and warmRain > 0;
- 20: Convective certain.  
When R\_type\_V = T\_conv; (no BB)  
and R\_type\_H = T\_conv;
- 21: Convective certain.  
When R\_type\_V = T\_others;  
and R\_type\_H = T\_conv;
- 22: Convective certain.  
When R\_type\_V = T\_conv;  
and R\_type\_H = T\_others;
- 23: Probably convective.  
When R\_type\_V = T\_conv; (BB exists)  
and R\_type\_H = T\_conv;

- 24: Maybe convective.  
When  $R\_type\_V = T\_conv$ ;  
and  $R\_type\_H = T\_stra$ ;
- 25: Maybe convective.  
When  $R\_type\_V = T\_stra$ ; (BB detection not so confident)  
and  $R\_type\_H = T\_conv$ ;
- 26: Maybe convective.  
Shallow isolated (type of warm rain) is detected  
When  $R\_type\_V = T\_conv$ ;  
 $R\_type\_H = T\_conv$ ;  
and  $warmRain > 0$ ;
- 27: Maybe convective.  
Shallow isolated (type of warm rain) is detected  
When  $R\_type\_V = T\_conv$ ;  
 $R\_type\_H = T\_others$ ;  
and  $warmRain > 0$ ;
- 28: Maybe convective.  
Shallow isolated (type of warm rain) is detected  
When  $R\_type\_V = T\_others$ ;  
 $R\_type\_H = T\_conv$ ;  
and  $warmRain > 0$ ;
- 29: Maybe convective.  
Shallow isolated (type of warm rain) is detected  
When  $R\_type\_V = T\_conv$ ;  
 $R\_type\_H = T\_stra$ ;  
and  $warmRain > 0$ ;
- 30: Others.  
When  $R\_type\_V = T\_others$ ;  
and  $R\_type\_H = T\_others$ ;
- 31: Others.  
Shallow isolated (type of warm rain) is detected.  
When  $R\_type\_V = T\_others$ ;  
 $R\_type\_H = T\_others$ ;  
and  $warmRain > 0$ ;

where

$R\_type\_V$ : rain type classified by the V-profile method,

R\_type\_H: rain type classified by the H-pattern method, which is based on SHY95 developed by Prof. Houze and his group.

The above assignment of numbers has the following meaning:

Rain Type Flag / 10 = 1: stratiform,  
2: convective,  
3: others.

Rain Type Flag % 10 = This indicates the level of confidence, which decreases as the number increases.

where Rain Type Flag % 10 means MOD (Rain Type Flag, 10) in FORTRAN.

When it is “no rain” or “data missing”, Rain Type Flag contains the following values:

-88: no rain  
-99: data missing

**Warm Rain Flag** (SDS, array size nray x nscan, 1-byte integer):

The Warm Rain Flag is set as follows:

0: warm rain is not detected;  
1: there may be “warm” rain;  
2: warm rain is detected (with high confidence).  
-88: no rain  
-99: data missing

**Status Flag** (SDS, array size nray x nscan, 1-byte integer):

The Status Flag indicates whether the data are obtained over sea or land and the confidence of 2A-23 product data. It is set as follows:

0:	good	(over ocean)
10:	BB detection may be good	(over ocean)
20:	R-type classification may be good (BB detection is good or BB does not exist)	(over ocean)
30:	Both BB detection and R-type classification may be good	(over ocean)
50:	not good (because of warnings)	(over ocean)
100:	bad (possible data corruption)	(over ocean)
1:	good	(over land)
11:	BB detection may be good	(over land)
21:	R-type classification may be good (BB detection is good or BB does not exist)	(over land)
31:	Both BB detection and R-type classification may be good	(over land)
51:	not good (because of warnings)	(over land)
101:	bad (possible data corruption)	(over land)

2:	good	(over coastline)
12:	BB detection may be good	(over coastline)
22:	R-type classification may be good (BB detection is good or BB does not exist)	(over coastline)
32:	Both BB detection and R-type classification may be good	(over coastline)
52:	not good (because of warnings)	(over coastline)
102:	bad (possible data corruption)	(over coastline)
4:	good	(over inland lake)
14:	BB detection may be good	(over inland lake)
24:	R-type classification may be good (BB detection is good or BB does not exist)	(over inland lake)
34:	Both BB detection and R-type classification may be good	(over inland lake)
54:	not good (because of warnings)	(over inland lake)
104:	bad (possible data corruption)	(over inland lake)
9:	may be good	(land/sea unknown)
19:	BB detection may be good	(land/sea unknown)
29:	R-type classification may be good (BB detection is good or BB does not exist)	(land/sea unknown)
39:	Both BB detection and R-type classification may be good	(land/sea unknown)
59:	not good (because of warnings)	(land/sea unknown)
109:	bad (possible data corruption)	(land/sea unknown)

When it is “no rain” or “data missing”, Status Flag contains the following values:

-88:	no rain
-99:	data missing

Assignment of the above numbers are based on the following rules:

When Status  $\geq 0$

Status/100	=	0: good, may be good, or not good 1: doubtful
(Status/10) % 10	=	0: good, may be good when status <100, and not good when status $\geq$ 100 1: BB detection not so confident 2: R-type classification not so confident (but BB detection is good, or when BB does not exist) 3: BB detection is not so confident and R-type classification not so confident 5: Over-all quality of the processed data for the j-th scan angle is not good (but may not be too bad to be classified as bad data)
Status % 10	=	0: over ocean 1: over land

- 2: over coastline
- 4: over inland lake
- 9: land/sea unknown

In other words, we can check the confidence level of 2A-23 by the following way:

- Status Flag  $\geq$  100 : bad (untrustworthy because of possible data corruption)
- 100> Status Flag  $\geq$  10 : result not so confident (warning)
- Status Flag = 9 : may be good
- 9> Status Flag  $\geq$  0 : good

The last digit of Status Flag indicates over ocean, land, etc.

**Range Bin Number** (SDS, array size nray x nscan, 2-byte integer):

A positive Range Bin Number corresponds to the height of bright band. Negative values are defined as follows:

- 1111: No bright band
- 8888: No rain

**Height of Bright Band** (SDS, array size nray x nscan, 2-byte integer):

A positive Height of Bright Band is defined in meters above mean sea level. Negative values are defined as follows:

- 1111: No bright band
- 8888: No rain
- 9999: Data missing

**Bright Band Intensity** (SDS, array size nray x nscan, 4-byte float):

The maximum value of the bright band (dBZ) obtained from normal samples.

The range is from 0.00 to 100.0 dBZ. Negative values are defined as:

- 1111: No bright band
- 8888: No rain
- 9999: Data missing

**Height of Freezing Level** (SDS, array size nray x nscan, 2-byte integer):

A positive Height of Freezing Level is the height of the 0°C isotherm above mean sea level in meters, estimated from climatological surface temperature data. Negative values are defined as:

- 5555: When error occurred in the estimation of Height of Freezing Level
- 8888: No rain
- 9999: Data missing

**Height of Storm** (SDS, array size nray x nscan, 2-byte integer):

A positive Height of Storm is the height of the storm top above mean sea level in meters. A positive Height of Storm is given only when rain is present with a high degree of confidence in 1C21 (i.e., the Minimum Echo Flag in 1C21 has the value of 2 [rain certain]). Negative values are defined as:

- 1111: Height of Storm not calculated because rain is not present with a high level of confidence in 1C21
- 8888: No rain
- 9999: Data missing

**Spare** (SDS, array size nray x nscan, 4-byte float):

Spare will characterize the width of the bright band. Since this characterization requires much research, the meaning is not disclosed.

**1.2.3 2A-25 - PR Profile**

2A-25, "PR Profile", produces an estimate of vertical rainfall rate profile for each radar beam. The rainfall rate estimate is given at each resolution cell of the PR radar. To compare with ground-based radar data, the attenuation corrected Z profile is also given. The average rainfall rate between the two pre-defined altitudes is calculated for each beam position. Other output data include parameters of Z-R relationships, integrated rain rate of each beam, range bin numbers of rain layer boundaries, and many intermediate parameters. Figure 1.2.3-1 shows the structure of the 2A-25 product in terms of the component objects and their sizes.

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

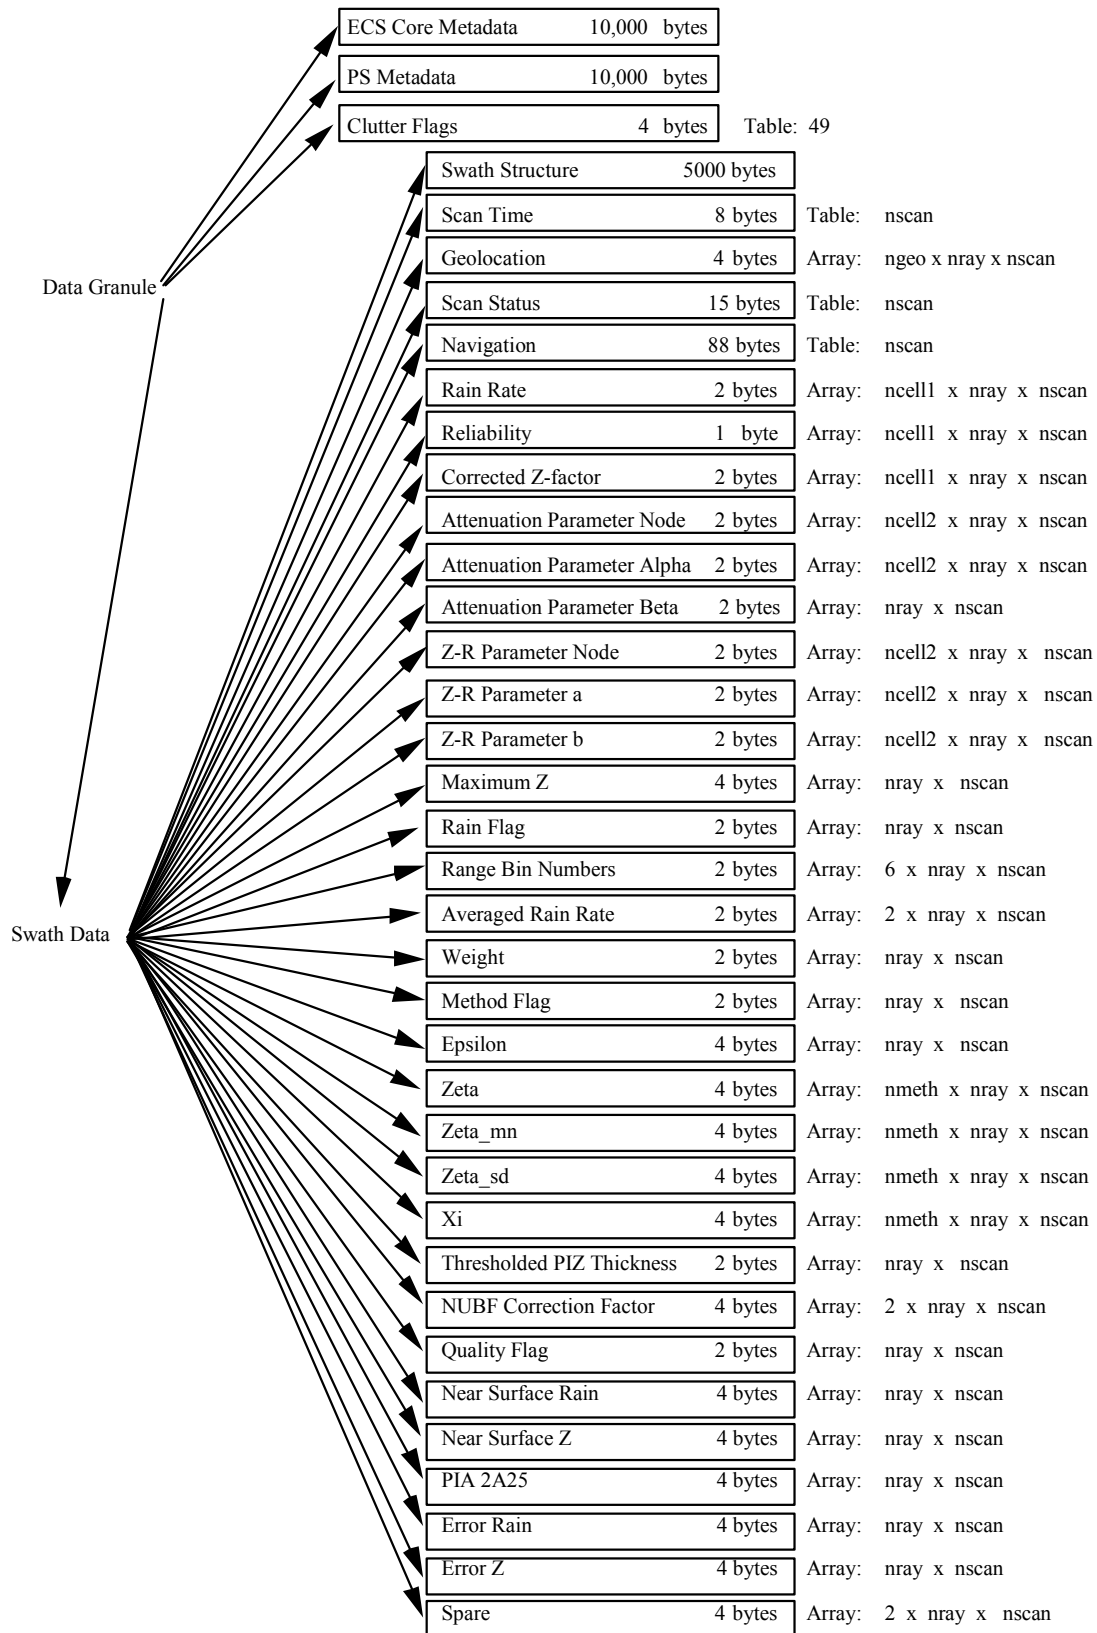


Figure 1.2.3-1 Data Format Structure for 2A-25, PR Profile

**PS Metadata** (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**Clutter Flags** (Vdata Table, record size 4 bytes, 49 records):

The Clutter Flags are identical to the clutter information in 1B-21 in the Ray Header. See Table 1.2.3-1.

**Table 1.2.3-1  
 2A-25 Clutter Flags**

Name		Format	Description
Mainlobe Edge	Clutter	1-byte integer	Absolute value of the difference in Range bin Numbers between the detected surface and the edge of the clutter from the mainlobe.
Sidelobe Range[3]	Clutter	3 x 1-byte integer	Absolute value of the difference in Range Bin Numbers between the detected surface and the clutter position from the sidelobe. A zero means no clutter indicated in this field since less than 3 bins contained significant clutter.

**SwathStructure** (Attribute, 5000-byte character):

SwathStructure gives the specification of the swath geometry. See Section 2 in Volume 3 of ICS, Level 1 File Specifications.

**Scan Time** (Vdata Table, record size 8 bytes, nscan records):

See the following Table 1.2.3-2.

**Table 1.2.3-2  
 2A-25 Scan Time**

Name	Format	Description
Scan Time	8-byte float	A time associated with the scan. The exact relationship between the Scan Time and the time of each IFOV is described in ICS Volume 3, section 3. Scan Time is expressed as the UTC seconds of the day.

**Geolocation** (SDS, array size ngeo x nray x nscan, 4-byte float):

The earth location of the center of the IFOV at the altitude of the earth ellipsoid. The first dimension is latitude and longitude, in that order. The next dimensions are pixel and scan. Values are represented as floating point decimal degrees. Off-earth is represented as -9999.9. Latitude is positive north, negative south. Longitude is positive east, negative west. A point on the 180° meridian is assigned to the western hemisphere.

**Scan Status** (Vdata Table, record size 15 bytes, nscan records):

The status of each scan is represented in terms of quality, platform and instrument control data, and fractional orbit number. See the description of the 1B-21 Scan Status in the ICS Volume 3. All bytes in the Scan Status are copied from the 1B-21 Scan Status including the Missing byte. 2A-25 should reset the Missing byte if it determines data is missing or there is no-rain.



**Navigation** (Vdata Table, record size 88 bytes, nscan records):  
See Appendix B in Volume 3 of ICS, Level 1 File Specifications

**Rain Rate** (SDS, array size ncell1 x nray x nscan, 2-byte integer):

This is the estimate of rain rate at the radar range gates from 0 to 20 km along the slant range. It ranges from 0.0 to 300.0 mmh<sup>-1</sup> and is multiplied by 100 and stored as a 2-byte integer. A value of -88.88 mm/hr (stored as -889) means ground clutter.

**Reliability** (SDS, array size ncell1 x nray x nscan, 1-byte integer):

The Reliability is that for estimated rain rates at the radar range gates from 0 to 20 km. It ranges from 0 to 255. If data are missing, the reliability will be set as 10000000 in binary. The default value is 0 (measured signal below noise). Bit 0 is the least significant bit (i.e., if bit i =1 and other bits =0, the unsigned integer value is 2<sup>i</sup>). The following meanings are assigned to each bit in the 8-bit integer if the bit = 1.

bit 0	rain possible
bit 1	rain certain
bit 2	bright band
bit 3	large attenuation
bit 4	weak return (Z <sub>m</sub> < 20 dBZ)
bit 5	estimated Z < 0 dBZ
bit 6	main-lobe clutter or below surface
bit 7	missing data

**Corrected Z-factor** (SDS, array size ncell1 x nray x nscan, 2-byte integer):

This is the attenuation corrected reflectivity factor (Z) at the radar range gates from 0 to 20 km along the slant range. It ranges from 0.0 to 80.0 dBZ and is multiplied by 100 and stored as a 2-byte integer. Values of reflectivity less than 0.0 dBZ are set to 0.0 dBZ. A value of -88.88 dB (stored as -8888) is a ground clutter flag.

**Attenuation Parameter Node** (SDS, array size ncell2 x nray x nscan, 2-byte integer):

The Attenuation Parameter Node gives the range bin numbers of the nodes at which the values of Attenuation Parameter Alpha are given (see below). The values of Alpha between the nodes are linearly interpolated. This variable ranges from 0 and 79 and is unitless.

**Attenuation Parameter Alpha** (SDS, array size ncell2 x nray x nscan, 2-byte integer):

The attenuation parameter Alpha ( $\alpha$ ) relates the attenuation coefficient, k (dB/km) to the Z-factor:  $k = \alpha Z^\beta$ .  $\alpha$  is computed at ncell2 radar range gates for each ray. It ranges from 0.000100 to 0.002000 and is multiplied by 10<sup>6</sup> and stored as a 2-byte integer.

**Attenuation Parameter Beta** (SDS, array size nray x nscan, 2-byte integer):

The Attenuation Parameter Beta ( $\beta$ ) relates the attenuation coefficient,  $k$  (dB/km) to the Z-factor:  $k = \alpha Z^\beta$ .  $\beta$  is computed for each ray. It ranges from 0.500 to 2.000 and is multiplied by  $10^3$  and stored as a 2-byte integer.

**Z-R Parameter Node** (SDS, array size ncell2 x nray x nscan, 2-byte integer):

The Z-R Parameter Node gives the range bin numbers of the nodes at which the Z-R parameters “a” and “b” are given (see below). The values of a and b between the nodes are linearly interpolated. This variable ranges from 0 and 79 and is unitless.

**Z-R Parameter a** (SDS, array size ncell2 x nray x nscan, 2-byte integer):

Parameter a for Z-R relationship ( $R=aZ^b$ ) is determined from the rain type and the height relative to the freezing level, the non-uniformity parameter ( $\xi$ ) and the correction factor ( $\epsilon$ ) for the surface reference technique. a is computed at ncell2 radar range gates for each ray. It ranges from 0.0050 to 0.2000 and is multiplied by  $10^4$  and stored as a 2-byte integer.

**Z-R Parameter b** (SDS, array size ncell2 x nray x nscan, 2-byte integer):

Parameter b for Z-R relationship ( $R=aZ^b$ ) is determined from the rain type and the height relative to the freezing level, the non-uniformity parameter ( $\xi$ ) and the correction factor ( $\epsilon$ ) for the surface reference technique. b is computed at ncell2 radar range gates for each ray. It ranges from 0.500 to 1.000 and is multiplied by  $10^3$  and stored as a 2-byte integer.

**Maximum Z** (SDS, array size nray x nscan, 4-byte float):

This is the maximum value of measured reflectivity factor at each IFOV. It ranges from 0.0 to 100.0 dBZ.

**Rain Flag** (SDS, array size nray x nscan, 2-byte integer):

The Rain Flag indicates rain or no rain status and the rain type assumed in rain rate retrieval. The default value is 0 (no rain). Bit 0 is the least significant bit (i.e., if bit  $i=1$  and other bits  $=0$ , the unsigned integer value is  $2^{**i}$ ). The following meanings are assigned to each bit in the 16-bit integer if the bit = 1.

bit 0	rain possible
bit 1	rain certain
bit 2	$\zeta^\beta > 0.5$ [Path Integrated Attenuation (PIA) larger than 3 dB]
bit 3	large attenuation (PIA larger than 10 dB)
bit 4	stratiform
bit 5	convective
bit 6	bright band exists
bit 7	warm rain
bit 8	rain bottom above 2 km
bit 9	rain bottom above 4 km
bit 10	not used
bit 11	not used
bit 12	not used

bit 13      not used  
bit 14      data missing between rain top and bottom  
bit 15      not used

**Range Bin Numbers** (SDS, array size 6 x nray x nscan, 2-byte integer):

This array gives the Range Bin Number of various quantities for each ray in every scan. The definitions are:

- top range bin number of the interval that is processed as meaningful data in 2A-25
- bottom range bin number of the interval that is processed as meaningful data in 2A-25
- actual surface range bin number
- range bin number of the bright band if it exists
- range bin number at which the path-integrated Z-factor first exceeds the given threshold
- range bin number at which the measured Z-factor is maximum

The Range Bin Numbers in this algorithm are different from the NASDA definition of Range Bin Number described in the ICS, Volume 3. The Range Bin Numbers in the algorithm range from 0 to 79 and have an interval of 250m. The earth ellipsoid is defined as range bin 79.

**Averaged Rain Rate** (SDS, array size 2 x nray x nscan, 2-byte integer):

There are two kinds of Average Rain Rate. The first one is the average rain rate for each ray between the two predefined heights of 2 and 4 km. It ranges from 0.0 to 3000.0 mm h<sup>-1</sup> and is multiplied by 10 and stored as a 2-byte integer. The second one is the integral of rain rate from rain top to rain bottom. It ranges from 0.0 to 300 mm h<sup>-1</sup> km and is multiplied by 100 and stored as a 2-byte integer.

**Weight** (SDS, array size nray x nscan, 2-byte integer):

Weighting factor in the calculation of epsilon (SRT correction factor) in the hybrid method. It ranges from 0.000 to 1.000 and is multiplied by 10<sup>3</sup> and stored as a 2-byte integer.

**Method Flag** (SDS, array size nray x nscan, 2-byte integer):

This flag indicates which method is used to derive the rain rate. The default value is 0 (including no rain case). Bit 0 is the least significant bit (i.e., if bit i =1 and other bits =0, the unsigned integer value is 2<sup>\*\*i</sup>).

Bits 0 and 1 contain the following values:

- 0 - rain over ocean
- 1 - rain over land
- 2 - rain over coast
- 3 - rain over other surface (inland lake, etc.)

The following meanings are assigned to the other bits in the 16-bit integer if the bit = 1.

bit 2	constant-Z-near-surface method
bit 3	rain in less than 5 bins
bit 4	not enough (<5) successive rain data
bit 5	positive slope near surface
bit 6	$\zeta \geq 1.0$
bit 7	quadratic weighting
bit 8	NUBF correction very large ( $> 2.0$ )
bit 9	No NUBF because NSD unreliable
bit 10	NUBF for Z-R below lower bound
bit 11	NUBF for PIA above upper bound
bit 12	NUBF for PIA below lower bound
bit 13	surface attenuation after NUBF correction $> 60$ dB
bit 14	data missing between rain top and bottom
bit 15	not used

**Epsilon** (SDS, array size nray x nscan, 4-byte float):

The Epsilon ( $\epsilon$ ) is the correction factor for the surface reference. It ranges from 0.0 to 100.0.

**Zeta** (SDS, array size nmeth x nray x nscan, 4-byte float):

The Zeta ( $\zeta$ ) roughly represents the rain rate integrated along the ray using two different methods. It ranges from 0.0 to 100.0 and is unitless.

**Zeta\_mn** (SDS, array size nmeth x nray x nscan, 4-byte float):

Zeta\_mn ( $\zeta_{mn}$ ) is the average of zeta ( $\zeta$ ) in the vicinity of each beam position (average over three scans and three IFOVs). It is calculated using two methods. It ranges from 0.0 to 100.0 and is unitless.

**Zeta\_sd** (SDS, array size nmeth x nray x nscan, 4-byte float):

Zeta\_sd ( $\zeta_{sd}$ ) is the standard deviation of zeta ( $\zeta$ ) in the vicinity of each beam position (using three scans and three IFOVs). It is calculated using two methods. It ranges from 0.0 to 100.0 and is unitless.

**Xi** (SDS, array size nmeth x nray x nscan, 4-byte float):

The Xi is the normalized standard deviation defined as Zeta\_sd/Zeta\_mn. When Zeta\_mn takes on small values (or zero) Xi is set to 99.0. It is calculated using two methods. Xi ranges from 0.0 to 99.0 and is unitless.

**Thresholded PIZ Thickness** (SDS, array size nray x nscan, 2-byte integer):

This is the number of range bins (250m resolution) between the highest range at which rain is certain and the range at which the Path-Integrated Z-factor (PIZ) first exceeds a threshold. This is a unitless quantity and it ranges from 0 to 79.

**NUBF Correction Factor** (SDS, array size 2 x nray x nscan, 4-byte float):

The Non-Uniform Beam Filling (NUBF) Correction Factor is used as a correction to reflectivity and attenuation calculations. The two NUBF Correction Factors are given for the k-Z and Z-R relations. The ranges are 1.0 to 3.0 and 0.8 to 1.0, respectively. Both are unitless quantities.

**Quality Flag** (SDS, array size nray x nscan, 2-byte integer):

This quality flag gives the overall error that affects the entire angle bin data, such as the error associated with the non-uniform beam filling effect and the surface reference reliability. It ranges from 0 to 255. If data are missing, the reliability will be set as 10000000 in binary. The default value is 0 (normal). Bit 0 is the least significant bit (i.e., if bit  $i = 1$  and other bits  $= 0$ , the unsigned integer value is  $2^{**i}$ ). The following meanings are assigned to each bit in the 16-bit integer if the bit = 1.

bit 0	unusual situation in rain average
bit 1	mean of zeta too small for NSD (xi) calculation
bit 2	NSD of zeta (xi) calculated from less than 6 points
bit 3	mean of PIA too small for NSD (PIA) calculation
bit 4	NSD of PIA calculated from less than 6 points
bit 5	epsilon not reliable (sigma0 marginally reliable)
bit 6	2A21 input data not reliable
bit 7	2A23 input data not reliable
bit 8	range bin error
bit 9	sidelobe clutter removal
bit 10	not used
bit 11	not used
bit 12	not used
bit 13	not used
bit 14	data missing between rain top and bottom
bit 15	not used

**Near Surface Rain** (SDS, array size nray x nscan, 4-byte float):

Rainfall rate near the surface. The range is 0 to 3000 mm/hr. A value of -99.99 mm/hr. is a missing flag.

**Near Surface Z** (SDS, array size nray x nscan, 4-byte float):

Reflectivity near the surface. The range is 0.0 to 100.0 dBZ. A value of -99.99 dBZ is a missing flag.

**PIA 2A25** (SDS, array size nray x nscan, 4-byte float):

The Path Integrated Attenuation (PIA) estimated by 2A25. The range is 0.0 to 50.0 dB.

**Error Rain** (SDS, array size nray x nscan, 4-byte float):

The error in Near Surface Rain Rate. The units are dB.

**Error Z** (SDS, array size nray x nscan, 4-byte float):

The error in Near Surface Z. The range is 0.0 to 100.0 dBZ.

**Spare** (SDS, array size 2 x nray x nscan, 4-byte float):  
Contents and ranges are not public.


### **1.3 TMI AND PR COMBINED**

There is one combined algorithm for TMI and PR, 2B-31 — TRMM Combined (PI: Dr. Ziad Haddad). The format of the product is based on the TRMM Science Requirements and algorithm description. The granule size is one orbit and has a PR based geometry. The following parameters are used in describing the formats:

- nscan: the number of PR scans within one granule (See ICS Volume 3 Section 3-6).
- nray: the number of rays within one PR scan line (49).
- ngeo: the number of geolocation data (2).
- Nradarrange: the number of radar range gates, up to about 20 km from the earth ellipsoid (80). The gates range from gate 0 to gate 79. Each gate is 250 m apart, with gate 79 at the earth ellipsoid.

#### **1.3.1 2B-31 - TRMM Combined**

2B-31, “TRMM Combined”, derives vertical hydrometeor profiles using data from PR radar and the 10Ghz channels of the TMI. It also computes the correlation-corrected mass-weighted mean drop diameter, the correlation-corrected relative spread of mass-weighted mean drop diameter, the correction made to the input path-integrated attenuation estimate and their standard deviations. Figure 1.3.1-1 shows the structure of the 2B-31 product in terms of the component objects and their sizes.

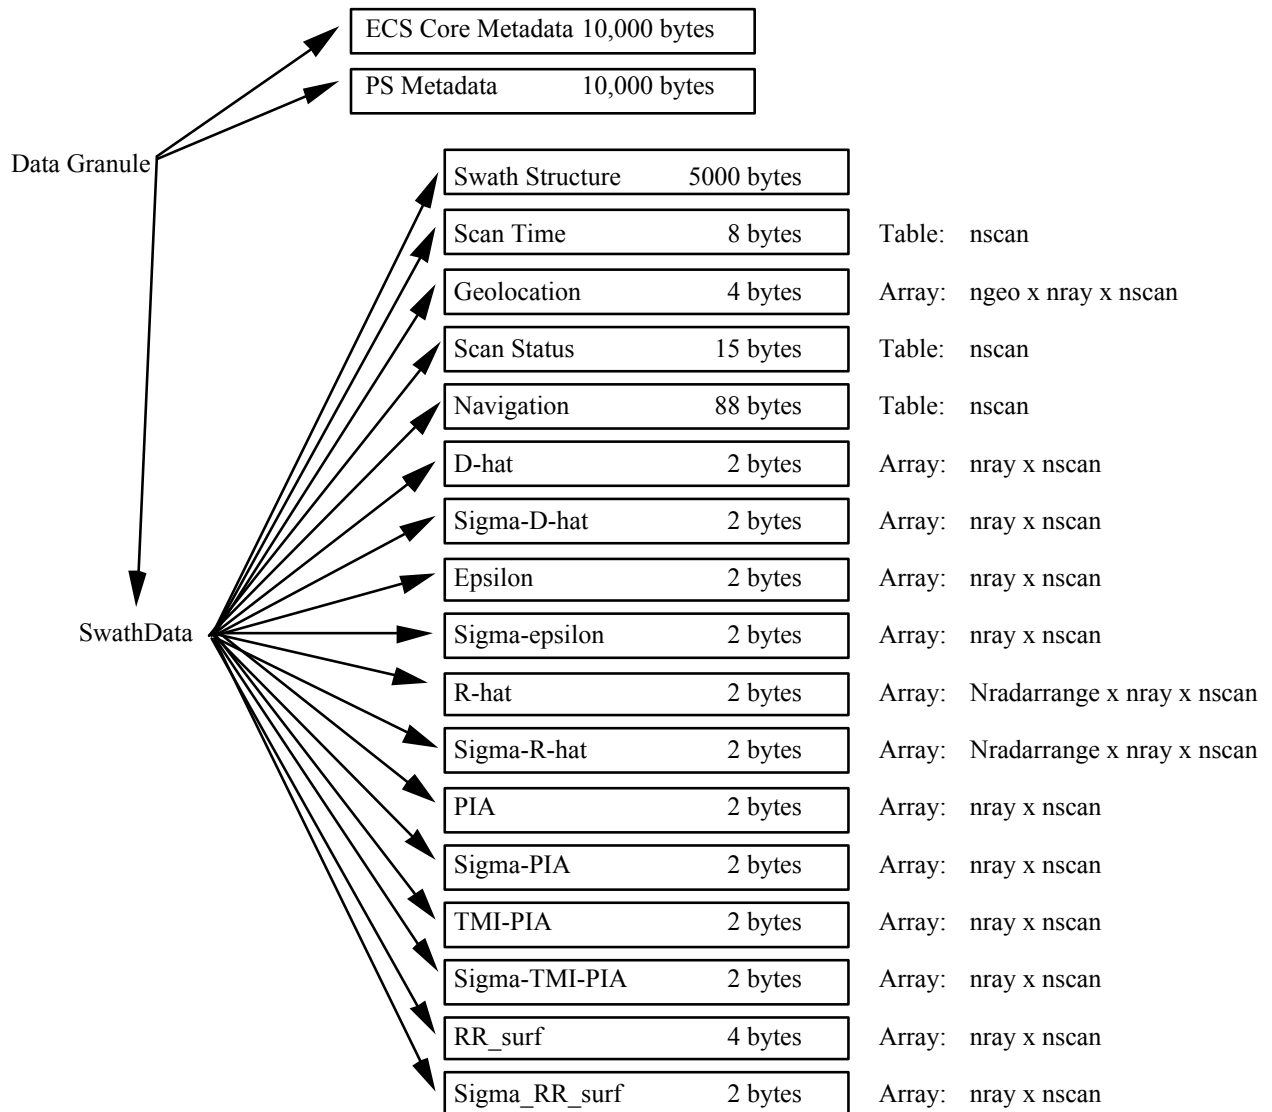

**Figure 1.3.1-1**  
**Data Format Structure for 2B-31, TRMM Combined**

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**SwathStructure** (Attribute, 5000-byte character):

SwathStructure gives the specification of the swath geometry. See Section 2 in Volume 3 of ICS, Level 1 File Specifications.

**Scan Time** (Vdata Table, record size 8 bytes, nscan records):

See the following Table 1.3.1-1.

**Table 1.3.1-1  
 2B-31 Scan Time**

Name	Format	Description
Scan Time	8-byte float	A time associated with the scan. The exact relationship between the Scan Time and the time of each IFOV is described in ICS Volume 3, section 3. Scan Time is expressed as the UTC seconds of the day.

**Geolocation** (SDS, array size ngeo x nray x nscan, 4-byte float):

The earth location of the center of the IFOV at the altitude of the earth ellipsoid. The first dimension is latitude and longitude, in that order. The next dimensions are high resolution pixel and scan. Values are represented as floating point decimal degrees. Off-earth is represented as -9999.9. Latitude is positive north, negative south. Longitude is positive east, negative west. A point on the 180° meridian is assigned to the western hemisphere.

**Scan Status** (Vdata Table, record size 15 bytes, nscan records):

The status of each scan is represented in terms of quality, platform and instrument control data, and fractional orbit number. See the description of the 1B-21 Scan Status in the ICS Volume 3. All bytes in the Scan Status are copied from the 1B-21 Scan Status including the Missing byte. 2B-31 will reset the Missing byte if it determines data is missing or there is no-rain.

**Navigation** (Vdata Table, record size 88 bytes, nscan records):

See Appendix B in Volume 3 of ICS, Level 1 File Specifications



**D-hat** (SDS, array size nray x nscan, 2-byte integer):

D-hat is the correlation-corrected mass-weighted mean drop diameter. It is multiplied by 100 and stored as a two-byte integer. The accuracy is 0.01 "normalized"\*mm. It ranges from 0.7 to 1.8 "normalized" mm (the value 0 indicates no rain or bad data). The accuracy is 0.01 "normalized" mm. The parameters  $\Lambda$ ,  $\mu$  and  $N_0$  of the corresponding drop size distribution  $N(D)dD = N_0 D^\mu e^{-\Lambda D} dD$ , giving the number per cubic-meter of drops of diameter between  $D$  and  $D + dD$  mm, can be obtained from dHat and the rain rate rHat using the formulas:

$$\begin{aligned} \mu &= -4 + 1 / (0.1521 \text{dHat}^{0.23} \text{rHat}^{0.074}) \\ \Lambda &= 1 / (0.1521 \text{dHat}^{1.33} \text{rHat}^{0.23}) \\ N_0 &= 55 \text{rHat} \Lambda^{\mu+4} / (\Gamma(\mu+4) (1 - (1 + 0.53/\Lambda)^{-\mu-4})) \end{aligned}$$

(+ice)

Similarly, the rain rate rHat mm/hr can be converted into a liquid water M (g/m<sup>3</sup>) using the formula:

$$M = \frac{0.02878 \text{rHat}}{1 - (1 + 0.53/\Lambda)^{-\mu-4}}$$

The average value of dHat is around 1.1 "normalized" mm, a unit which comes from the fact that dHat is related to the true mass-weighted mean drop diameter  $D^*$  mm by the formula  $\text{dHat} = D^* \text{rHat}^{-0.155}$  (with rHat in mm/hr).

**Sigma-D-hat** (SDS, array size nray x nscan, 2-byte integer):

Sigma-D-hat is the RMS uncertainty in D-Hat. It ranges from 0.00 to 2.00 "normalized"\* mm and is multiplied by 100 and stored as a two-byte integer. The accuracy is 0.01 "normalized" mm.

**Epsilon** (SDS, array size nray x nscan, 2-byte integer):

Epsilon is the correction made to the input path-integrated attenuation estimate. It ranges from -50.0 to 50.0 dB and is multiplied by 10 and stored as a two-byte integer. The accuracy is 0.1 dB.

**Sigma-epsilon** (SDS, array size nray x nscan, 2-byte integer):

Sigma-epsilon is the RMS uncertainty in the correction made to the input path-integrated attenuation estimate. It ranges from 0.0 to 50.0 dB and is multiplied by 10 and stored as a two-byte integer. The accuracy is 0.1dB.

**R-hat** (SDS, array size Nradarrange x nray x nscan, 2-byte integer):

R-hat is the instantaneous rain rate at the radar range gates. It ranges from 0.0 to 500.0 mm/hr and is multiplied by 10 and stored as a two-byte integer. The accuracy is 0.1 mm/hr.

**Sigma-R-hat** (SDS, array size Nradarrange x nray x nscan, 2-byte integer):

Sigma-R-hat is the RMS uncertainty in the R-hat estimated at the radar range gates. It is multiplied by 10 and stored as a two-byte integer. It ranges from -125 to 125 mm/hr (the negative sign indicating estimates based on a "rain-possible" detection by the radar rather than

the “rain-certain” associated with positive values). The values -125 and 125 are reserved for cases where the RMS uncertainty could not be accurately estimated. The accuracy is 0.5 mm/hr.

**PIA** (SDS, array size nray x nscan, 2-byte integer):

PIA is the PR + TMI estimate of the path-integrated one-way radar attenuation. It ranges from 0.0 to 50.0 dB and is multiplied by 10 and stored as a two-byte integer. The accuracy is 0.1 dB.

**Sigma-PIA** (SDS, array size nray x nscan, 2-byte integer):

Sigma-PIA is the RMS uncertainty in PIA. It ranges from 0.0 to 50.0 dB and is multiplied by 10 and stored as an integer. The accuracy is 0.1 dB.

**TMI-PIA** (SDS, array size nray x nscan, 2-byte integer):

TMI-PIA is the TMI-based estimate of the one-way path-integrated radar attenuation. It ranges from 0.0 to 50.0 dB and is multiplied by 10 and stored as a two-byte integer. The accuracy is 0.1 dB

**Sigma-TMI-PIA** (SDS, array size nray x nscan, 2-byte integer):

Sigma-TMI-PIA is the RMS uncertainty in the TMI-PIA. It ranges from 0.0 to 50.0 dB and is multiplied by 10 and stored as a two-byte integer. The accuracy is 0.1 dB.

**RR-Surf** (SDS, array size nray x nscan, 4-byte float):

The RR-Surf is the surface rainrate. It ranges from 0.0 to 500.0 mm/hr. The accuracy is 0.1 mm/hr.

**Sigma-RR-Surf** (SDS, array size nray x nscan, 2-byte integer):

The Sigma-RR-Surf is the RMS uncertainty in RR-Surf. It is multiplied by 100 and stored as a two-byte integer. It ranges from -125 to 125 mm/hr (the negative sign indicating estimates based on a “rain-possible” detection by the radar rather than the “rain-certain” associated with positive values). The values -125 and 125 are reserved for cases where the RMS uncertainty could not be accurately estimated. The accuracy is 0.5mm/hr.

\* "normalized units" are defined as follows:

If a variable X, expressed in grams, is correlated with the rain rate R and a variable Y is defined where  $Y = X * R^{0.37}$ , then the unit of Y is called “normalized grams”.

## 1.4 GV RADAR

There are four Level 2A products for GV radar, 2A-52 — Existence (Contact: Dr. Michael Biggerstaff), 2A-53 — Radar Site Rain Map (Contact: Dr. Michael Biggerstaff), 2A-54 — Radar Site Convective/Stratiform Map (Contact: Dr. Michael Biggerstaff), and 2A-55 — Radar Site 3-D Reflectivities (Contact: Dr. Michael Biggerstaff). The formats of these products are based on the Version 1 algorithm descriptions and consultation with GV radar algorithm scientists. The granule size is one hour for 2A-53, 2A-54, and 2A-55 but one month for 2A-52. The following parameters are used in describing the formats:

- nvol: the number of volume scans within one granule (see Section 7 of Volume 3 of ICS for detailed explanation);
- nx\_prod: the number of points in the x-dimension of a 3-D Cartesian grid; 151 for single radar sites; 363 for the multiple radar site in Texas and 257 for the Florida multiple radar site;
- ny\_prod: the number of points in the y-dimension of a 3-D Cartesian grid; 151 for single radar sites; 285 for the multiple radar site in Texas and 353 for the Florida multiple radar site;
- nz: the number of points in the z-dimension of a 3-D Cartesian grid; 13 for both single and multiple radar sites;
- ncat: the number of categories for computing CFADs and vertical profiles. There are 12 categories (eg., stratiform precipitation, convective precipitation, water surface, and land, etc.) that are enumerated in each section where they apply;
- nbin: the maximum number of reflectivity bins; this is 86 which will allow a reflectivity range of -15dBZ to 70 dBZ with increments of 1 dBZ.

### 1.4.1 2A-52 - Existence

2A-52, “Existence”, is the fraction of the radar FOV which has measurable precipitation. The GV radar FOV is defined as a base scan (i.e., the lowest level sweep). The output will be ASCII files instead of HDF files. In addition to the ASCII product file there will be a detached SFDU header. The SFDU header is described in the **Interface Control Document Between EOSDIS Core System (ECS) and TRMM Science Data and Information System (TSDIS) for the ECS Project**. Each product file has the Existence data of one site (not one radar) for one month. Figure 1.4.1-1 shows an example of 2A-52 output.

Note: The column numbers at the bottom of the example do not appear in the 2A52 product, they exist in this example only to show the positions of each field.

Date of VOS	Time of VOS	% Rain	Hit	Distance of Closest Approach (CA)	Date of CA	Time of CA
1998-01-01	14:55:52.000	3	0	-9999.900	NULL	NULL
1998-01-01	15:05:40.000	34	1	149.868	1998-01-01	15:06:11.946
1234567890123456789012345678901234567890123456789012345678901234567890						

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

**Figure 1.4.1-1**  
**Example of 2A-52, Existence.**

The data is organized in seven columns separated by white space. All lines have 80 characters of data (including spaces). Each 80 character line is terminated with a line feed. The first two lines of the file are the column descriptors. The third line is a dashed line. Data start at the fourth line. The data fields and the lengths are as follows:

**Date of VOS**

The Date of VOS is the date of the beginning of the VOS. It has format of YYYY-MM-DD, where YYYY=year, MM=month, DD=day, and “-” is literal. Data for this field starts at column 1 (see Fig. 1.4.1-1).

**Time of VOS**

The Time of VOS is the time (UTC) of the beginning of the VOS. It has format of HH:MM:SS.sss, where HH=hour, MM=minute, SS=second, sss=millisecond, “:” and “.” are literals. Data for this field starts at column 13 (see Fig. 1.4.1-1).

**%Rain**

%Rain is the percent of the raining area in the radar FOV. It is an integer value with a range of 0 to 100. Data for this field starts at column 29 (see Fig. 1.4.1-1).

**Hit**

The Hit field specifies which VOS was obtained when the satellite was the closest to the radar during coincidence. This will be a logical flag, 0(no hit) or 1(hit). There is a time limit of +/-30 minutes in seeking out the ‘closest’ volume scan (for example, for cases when the radar was down). Data for this field starts at column 35 (see Fig. 1.4.1-1).

**Distance of Closest Approach (CA)**

Distance of Closest Approach (CA) is the distance (km) from the radar to the sub-satellite point when a “Hit” occurred. It is a floating point value with 3 decimal point precision and a range from 0.000 to 750.000. If there was no hit, -9999.9 will be used. Data for this field starts at column 44 (see Fig. 1.4.1-1).

**Date of CA**

Date of CA (Date of Closest Approach) gives the date when the satellite is closest to the radar site. It has the same format as Date of VOS, while “NULL” will be used in the cases of “No Hit”. Data for this field starts at column 58, if 'NULL' than column 61 (see Fig. 1.4.1-1).


### Time of CA

Time of CA (Time of Closest Approach) gives the time (UTC) when the satellite is closest to the radar. It has the same format as Time of VOS, while “NULL” will be used in the cases of “No Hit”. Data for this field starts at column 69, if 'NULL' than column 70 (see Fig. 1.4.1-1).

It should be noted that, in the case of a multiple radar site, %Rain is a combined result from all radars at that site, but Date of VOS, Time of VOS, Hit, Distance of Closest Approach, Date of CA and Time of CA apply to the primary radar only.

### 1.4.2 2A-53 - Radar Site Rain Map

2A-53, “Radar Site Rain Map”, is an instantaneous surface rain rate map in Cartesian coordinates with a 2 km horizontal resolution. At single radar sites, the map covers an area of 300km x 300km. For the multiple radar site in Texas, the map covers a region of 724 km x 568 km, and in Florida 512 km x 704 km. Figure 1.4.2-1 shows the structure of the 2A-53 product in terms of the component objects and their sizes.

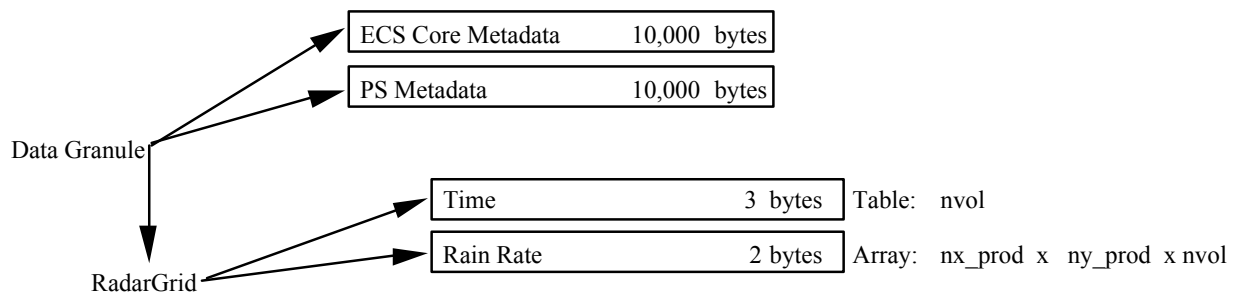

**Figure 1.4.2-1  
 Data Format Structure for 2A-53, Radar Site Rain Map.**

The contents of objects in the structure are as follows:

#### **ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

#### **PS Metadata** (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

#### **Time** (Vdata Table, record size 3 bytes, nvol records):

The time is the UTC hour-of-day, minute-of-hour and second-of-minute for the start of each VOS in the granule. See the following Table 1.4.2-1.

**Table 1.4.2-1**  
**2A-53 Time**


Name	Format	Description
Hour	1-byte integer	the UTC hour-of-day for the start of one volume scan.
Minute	1-byte integer	the UTC minute-of-hour for the start of one volume scan.
Second	1-byte integer	the UTC second-of-minute for the start of one volume scan.

**Rain Rate** (SDS, array size: nx\_prod x ny\_prod x nvol, 2-byte integer):

This is the rain rate at the base scan. The rain rate ranges from 0.0 to 1000.0 mm h<sup>-1</sup>. It is multiplied by 10 and stored as a 2-byte integer.

### 1.4.3 2A-54 - Radar Site Convective/Stratiform Map

2A-54, “Radar Site Convective/Stratiform Map”, is an instantaneous map in Cartesian coordinates with a 2 km resolution. At single radar sites, the map covers an area of 300 km x 300 km. For the multiple radar site in Texas, the map covers a region of 724 km x 568 km, and in Florida 512 km x 704 km. The map identifies the surface precipitation as convective or stratiform. Figure 1.4.3-1 shows the structure of the 2A-54 product in terms of the component objects and their sizes.

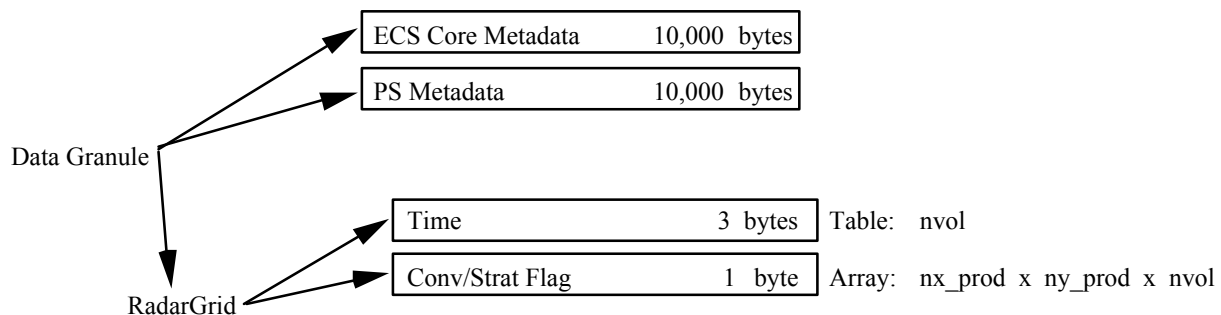

**Figure 1.4.3-1**  
**Data Format Structure for 2A-54, Radar Site Convective/Stratiform Map**

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**Time** (Vdata Table, record size 3 bytes, nvol records):

The time is the UTC hour-of-day, minute-of-hour and second-of-minute for the start of each VOS in the granule. See the following Table 1.4.3-1.

**Table 1.4.3-1  
 2A-54 Time**

Name	Format	Description
Hour	1-byte integer	the UTC hour-of-day for the start of one volume scan.
Minute	1-byte integer	the UTC minute-of-hour for the start of one volume scan.
Second	1-byte integer	the UTC second-of-minute for the start of one volume scan.


**Conv/Strat Flag** (SDS, array size: nx\_prod x ny\_prod x nvol, 1-byte integer):

The Convective/Stratiform flag is an instantaneous map in Cartesian coordinates. Each value represents the rain type of the entire vertical column. The following values are assigned for the Convective/Stratiform Flag:

- 0: no echo;
- 1: stratiform;
- 2: convective.
- 99: missing data

**1.4.4 2A-55 - Radar Site 3-D Reflectivities**

2A-55, “Radar Site 3-D Reflectivities”, is composed of 3 different fields. The first field has an array of 3-D reflectivities in Cartesian coordinates with a 2 km horizontal resolution over an area of 300 km x 300 km for single radar sites, and 724 km x 568 km for Texas multiple radar site, 512 km x 704 km for Florida multiple radar site. It has a vertical resolution of 1.5km and a height range up to 19.5 km. The second field has an array of vertical profiles based on the first field, and the third field has an array of the Contoured Frequency by Altitude Diagram (CFAD) data based on the first and second field. Figure 1.4.4-1 shows the structure of the 2A-55 product in terms of the component objects and their sizes.

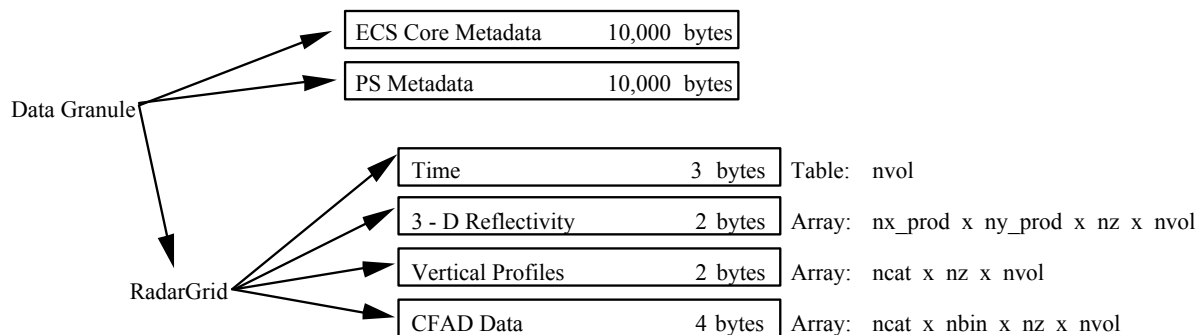

**Figure 1.4.4-1  
 Data Format Structure for 2A-55, Radar Site 3-D Reflectivity**

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**Time** (Vdata Table, record size 3 bytes, nvol records):

The time is the UTC hour-of-day, minute-of-hour and second-of-minute for the start of each VOS in the granule. See the following Table 1.4.4-1.

**Table 1.4.4-1  
 2A-55 Time**

Name	Format	Description
Hour	1-byte integer	the UTC hour-of-day for the start of one volume scan.
Minute	1-byte integer	the UTC minute-of-hour for the start of one volume scan.
Second	1-byte integer	the UTC second-of-minute for the start of one volume scan.

**3-D Reflectivity** (SDS, array size nx\_prod x ny\_prod x nz x nvol, 2-byte integer):

The 3-D Reflectivity is the instantaneous reflectivity interpolated from volume scans onto a 3-D Cartesian coordinate system with a 1.5km vertical resolution to a height of 19.5km, and a 2 km horizontal resolution with varied covering ranges from single radar sites to multiple radar sites. For single radar sites, the horizontal area is 300 km x 300 km. At the multiple radar site in Texas, the area is 724 km x 568 km while in Florida it is 512 km x 704 km. Values range from -15.00 to 70.00 dBZ and are multiplied by 100 and stored as a 2-byte integer.

**Vertical Profiles** (SDS, array size ncat x nz x nvol, 2-byte integer):

The vertical profiles include reflectivities at each of the nz analysis levels for the following categories:

- total;
- total over land;
- total over sea;
- convective;
- convective over land;
- convective over sea;
- stratiform;



- stratiform over land;
- stratiform over sea;
- anvil (Anvil is defined as echo aloft with no contribution to surface rain.);
- anvil over land;
- anvil over sea.

Values range from -15.00 to 70.00 dBZ and are multiplied by 100 and stored as a 2-byte integer.

**CFAD Data** (SDS, array size ncat x nbin x nz x nvol, 4-byte integer):

The CFAD Data are the numbers of pixels counted in specified height-reflectivity bin pairs for the 12 categories listed below for each volume of radar data. nbin is the number of reflectivity bins and ranges from -15 dBZ to 70 dBZ. Values range from 0 to 22,801 (151 x 151) for single radar sites while from 0 to 103,455 (363 x 285) for Texas multiple radar site, and 0 to 90,721 (257 x 353) for Florida multiple radar site. The 12 categories are:

- 1) total;
- 2) total over land;
- 3) total over sea;
- 4) convective;
- 5) convective over land;
- 6) convective over sea;
- 7) stratiform;
- 8) stratiform over land;
- 9) stratiform over sea;
- 10) anvil (Anvil is defined as echo aloft with no contribution to surface rain.);
- 11) anvil over land;
- 12) anvil over sea.

## **2. LEVEL 3 PRODUCTS**

Level 3 data products are either 5-day or monthly products calculated from Level 1 and Level 2 data. TSDIS will produce 9 Level 3 products from satellite data and ground validation data. Satellite data include TMI, VIRS, PR data from TRMM satellite, the SSM/I data from Defense Meteorological Satellite Program (DMSP) polar orbiting satellites, infrared data from the Geostationary Operational Environmental Satellite (GOES) which are available from Global Precipitation Climatology Project (GPCP) and the global rain gauge data from both the Global Precipitation Climatology Center (GPCC) and the Climate Assessment and Monitoring System (CAMS). Only GV radar data are included as input data for Level 3 GV products.

### **2.1 TRMM MICROWAVE IMAGER (TMI)**

There is one level 3A data product for TMI, 3A-11 — TMI Emission (PI: Dr. Alfred Chang). The format of this product is designed in consultation with TMI algorithm scientists. The granule size is one month. The following parameters are used in describing the formats:

nlat: the number of 5° grid intervals of latitude from 40° N to 40° S (16).

nlon: the number of 5° grid intervals of longitude from 180°W to 180°E (72).

#### **2.1.1 3A-11 - TMI Emission**

3A-11, “TMI Emission”, produces 5° x 5° monthly oceanic rainfall maps using TMI Level-1 data. Statistics of the monthly rainfall will also be calculated. Figure 2.1.1-1 shows the structure of the 3A-11 product in terms of the component objects and sizes.

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**GridStructure** (Attribute, 5000-byte character):


GridStructure gives the specification of the geometry of the grids. See Section 2 in Volume 3 of ICS, Level 1 File Specifications

**Monthly Rainfall** (SDS, array size nlat x nlon, 2-byte integer):

The Monthly Rainfall is the surface rainfall over oceans in 5° x 5° boxes from 40°N to 40°S. It ranges from 0.0 to 3000.0 mm and is multiplied by 10 and stored as a 2-byte integer. Data on land areas are assigned the value -9999.

**Number of Samples** (SDS, array size nlat x nlon, 4-byte integer):

The Number of Samples is that over oceans in 5° x 5° boxes for one month. It ranges from 0 to 500,000. Data on land areas are assigned the value -9999.

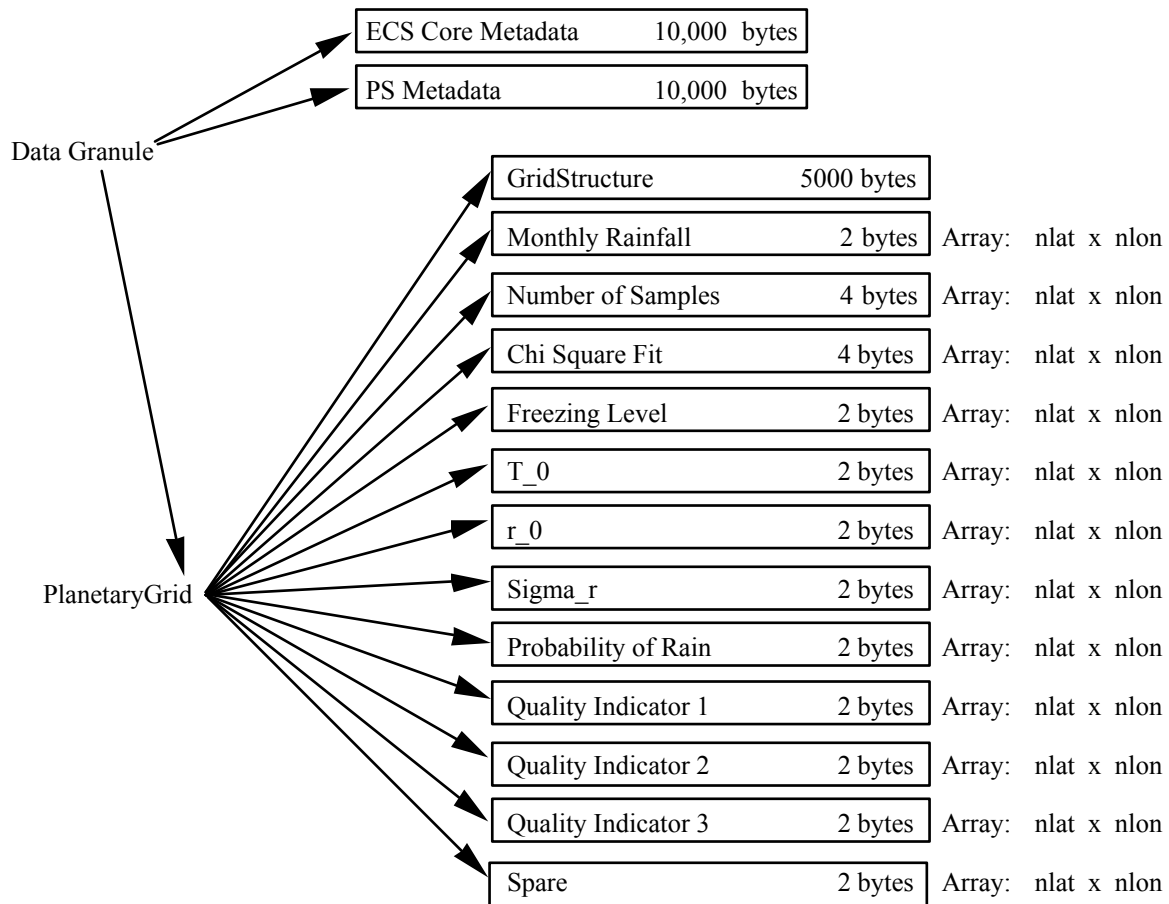

**Figure 2.1.1-1**  
**Data Format Structure for 3A-11, TMI Emission**

**Chi Square Fit** (SDS, array size nlat x nlon, 4-byte integer):

The Chi Square Fit indicates how well the histogram of brightness temperatures fits the lognormal distribution function in 5° x 5° boxes for one month. It ranges from 1 to 1,000,000,000. Data on land areas are assigned the value -9999.

**Freezing Level** (SDS, array size nlat x nlon, 2-byte integer):

The Freezing Level is the estimated height of 0°C isotherm over oceans in 5° x 5° boxes for one month. It ranges from 0.00 to 6.00 km and is multiplied by 100 and stored as a 2-byte integer. Data on land areas are assigned the value -9999.

**T\_0** (SDS, array size nlat x nlon, 2-byte integer):

The T\_0 is the mean of non-raining brightness temperatures over oceans in 5° x 5° boxes for one month. It ranges from 160.0 to 180.0 K and is multiplied by 10 and stored as a 2-byte integer. Data on land areas are assigned the value -9999.

**r\_0** (SDS, array size nlat x nlon, 2-byte integer):

The r\_0 is the logarithmic mean rain rate over oceans in 5° x 5° boxes for one month. It ranges from 0.00 to 15.00 mm h<sup>-1</sup> and is multiplied by 100 and stored as a 2-byte integer. Data on land areas are assigned the value -9999.

**Sigma\_r** (SDS, array size nlat x nlon, 2-byte integer):

The Sigma\_r( $\sigma_r$ ) is the standard deviation of logarithmic rain rates over oceans in 5° x 5° boxes for one month. It ranges from 0.00 to 1.00 mm h<sup>-1</sup> and is multiplied by 100 and stored as a 2-byte integer. Data on land areas are assigned the value -9999.

**Probability of Rain** (SDS, array size nlat x nlon, 2-byte integer):

The Probability of Rain is that over oceans in 5° x 5° boxes for one month. It ranges from 0.000 to 1.000 and is multiplied by 1000 and stored as a 2-byte integer. Data on land areas are assigned the value -9999.

**Quality Indicator 1** (SDS, array size nlat x nlon, 2-byte integer):

TBD

**Quality Indicator 2** (SDS, array size nlat x nlon, 2-byte integer):

TBD

**Quality Indicator 3** (SDS, array size nlat x nlon, 2-byte integer):

TBD

**Spare** (SDS, array size nlat x nlon, 2-byte integer):

TBD.

## 2.2 PRECIPITATION RADAR (PR)

There are two Level 3A products for the PR, 3A-25 — PR Rainfall (PI: Dr. Robert Meneghini), and 3A-26 — Surface Rain (PI: Dr. Robert Meneghini). The formats of these products are based on Version 2.2 algorithm descriptions given by PR algorithm scientist. The granule size is one month. The following parameters are used in describing the formats:

nlat: the number of 5° grid intervals of latitude from 40° N to 40° S (16).

- nlon: the number of 5° grid intervals of longitude from 180°W to 180°E (72).
- nlat: the number of 0.5° grid intervals of latitude from 37° N to 37° S (148).
- nlonh: the number of 0.5° grid intervals of longitude 180°W to 180°E (720).
- nh1: the number of fixed heights above the earth ellipsoid, at 2, 4, 6, 10, and 15 km plus one for path-average (6).
- nh2: the number of fixed heights above the earth ellipsoid, at 2, 4, and 6 km (3).
- nh3: the number of fixed heights above the earth ellipsoid, at 2, 4, and 6 km plus one for path-average (4).
- ncat1: the first number of categories for histograms (25). ncat1 is currently not used.
- ncat2: the second number of categories for histograms (30). Note that the number of thresholds is one greater than the number of categories. Thresholds are given below for several variables, others are **TBD**.

Reflectivity (dBZ) (bhz):

0.01, 12., 14., 16., 18., 20., 22., 24., 26., 28., 30., 32., 34., 36., 38., 40., 42., 44., 46., 48., 50., 52., 54., 56., 58., 60., 62., 64., 66., 68., 70.

Bright Band Height (km) (bhbb):

0.01, 0.25, 0.5, 0.75, 1., 1.25, 1.5, 1.75, 2., 2.25, 2.5, 2.75, 3., 3.25, 3.5, 3.75, 4., 4.25, 4.5, 4.75, 5., 5.25, 5.5, 5.75, 6., 6.25, 6.5, 6.75, 7., 7.5, 20.

Storm Height (km) (bhstorm):

0.01, 0.5, 1., 1.5, 2., 2.5, 3., 3.5, 4., 4.5, 5., 5.5, 6., 6.5, 7., 7.5, 8., 8.5, 9., 9.5, 10., 10.5, 11., 11.5, 12., 12.5, 13., 14., 15., 16., 20.

Snow Depth (km) (bhdepth):

0.01, 0.5, 0.75, 1., 1.25, 1.5, 1.75, 2., 2.25, 2.5, 2.75, 3., 3.25, 3.5, 3.75, 4., 4.25, 4.5, 4.75, 5., 5.25, 5.5, 5.75, 6., 6.25, 6.5, 6.75, 7., 7.25, 7.5, 20.

Zpzm (km) (bhspzm):

0., 1., 2., 3., 4., 5., 6., 7., 8., 9., 10., 11., 12., 13., 14., 15., 16., 17., 18., 19., 20., 22., 24., 26., 28., 30., 32., 34., 36., 38., 50.

All PIA (dB) (bhpia):

0.01, 0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.8, 1.0, 1.2, 1.4, 1.6, 1.8, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0, 7.5, 8.0, 8.5, 9.0, 9.5, 10., 100.

NUBF or Non-Uniform Beam Filling Factor (unitless) (bhnuhf):

1., 1.05, 1.1, 1.15, 1.2, 1.25, 1.3, 1.35, 1.4, 1.45, 1.5, 1.55, 1.6, 1.65, 1.7, 1.75, 1.8, 1.85, 1.9, 1.95, 2., 2.1, 2.2, 2.3, 2.4, 2.5, 2.6, 2.7, 2.8, 2.9, 3.0

Xi or Horizontal Non-Uniformity Parameter (unitless) (bhxi):

0., 0.2, 0.4, 0.6, 0.8, 1., 1.2, 1.4, 1.6, 1.8, 2., 2.2, 2.4, 2.6, 2.8, 3., 3.2, 3.4, 3.6, 3.8, 4., 4.2, 4.4, 4.6, 4.8, 5., 10., 20., 30., 50., 10000.

Epsilon conditioned on use of SRT (unitless) (bhepsilon):

0., 0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1., 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.9, 2.,  
2.1, 2.2, 2.3, 2.4, 2.5, 2.6, 2.7, 2.8, 2.9, 3.0

ncat3: the number of categories for probability distribution functions (25).

Rain rate thresholds (mm/hr) are:

12., 14., 16., 18., 20., 22., 24., 26., 28., 30., 32., 34., 36., 38., 40., 42., 44., 46., 48., 50.,  
52., 54., 56., 58., 60.

nang: the number of fixed incidence angles, at 0°, 5°, 10° and 15° (4).

nthrsh: the number of thresholds used for probability distribution functions (6).

Q-thresholds for Zero order:

0.1, 0.2, 0.3, 0.5, 0.75, 50.

Q-thresholds for HB:

0.1, 0.2, 0.3, 0.5, 0.75, 0.9999

pia-thresholds for SRT:

1.5, 1., 0.8, 0.6, 0.4, 0.1

### **2.2.1 3A-25 - PR Rainfall**

3A-25, "PR Rainfall", computes monthly statistics of the PR measurements at both a low horizontal resolution (5° x 5° latitude/longitude) and a high horizontal resolution (0.5° x 0.5° latitude/longitude). The low resolution grids are in the Planetary Grid 1 structure and include 1) mean and standard deviation of the rain rate, reflectivity, path-integrated attenuation (PIA), storm height, Xi, bright band height and the NUBF (Non-Uniform Beam Filling) correction; 2) rain fractions; 3) histograms of the storm height, bright-band height, snow-ice layer, reflectivity, rain rate, path-attenuation and NUBF correction; 4) correlation coefficients. For the high resolution grids in the Planetary Grid 2 structure, mean rain rate along with standard deviation and rain fractions are computed. Figure 2.2.1-1 shows the structure of the 3A-25 product in terms of the component objects and their sizes. The Vgroups of PlanetaryGrid 1 and PlanetaryGrid 2 are Planetary Grid structure.

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**GridStructure** (Attribute, 5000-byte character):

GridStructure gives the specification of the geometry of the grids in Planetary Grid 1. See Section 2 in Volume 3 of ICS, Level 1 File Specifications.

**Rain Rate Mean 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

Rain Rate Mean 1 gives means of non-zero rain rates over  $5^\circ \times 5^\circ$  boxes for one month. The rain rates are determined in 2A-25 and evaluated for the path-average and at the fixed heights of 2, 4, 6, 10 and 15 km. It ranges from 0.0 to 3000.0 mm/h.

**Rain Rates Dev. 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

These are standard deviations of non-zero rain rates over  $5^\circ \times 5^\circ$  boxes for one month. The rain rates are determined in 2A-25 and evaluated for path-average and at the fixed heights of 2, 4, 6, 10 and 15 km. It ranges from 0.0 to 3000.0 mm/h.

**Conv. Rain Rate Mean 1** (SDS, array size nlat x nlon x nh1, 4-byte float):


Conv. Rain Rate Mean 1 gives means of non-zero rain rates for convective rain over  $5^\circ \times 5^\circ$  boxes for one month. The rain rates are determined in 2A-25 and evaluated for path-average and at the fixed heights of 2, 4, 6, 10 and 15 km. It ranges from 0.0 to 3000.0 mm/h.

**Conv. Rain Rates Dev. 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

Conv. Rain Rates Dev. 1 gives standard deviations of non-zero rain rates for convective rain over  $5^\circ \times 5^\circ$  boxes for one month. The rain rates are determined in 2A-25 and evaluated for path-average and at the fixed heights of 2, 4, 6, 10 and 15 km. It ranges from 0.0 to 3000.0 mm/h.

**Strat. Rain Rate Mean 1** (SDS, array size nlat x nlon x nh1, 4-byte float):


Strat. Rain Rate Mean 1 gives means of non-zero rain rates for stratiform rain over  $5^\circ \times 5^\circ$  boxes for one month. The rain rates are determined in 2A-25 and evaluated for path-average and at the fixed heights of 2, 4, 6, 10 and 15 km. It ranges from 0.0 to 3000.0 mm/h.

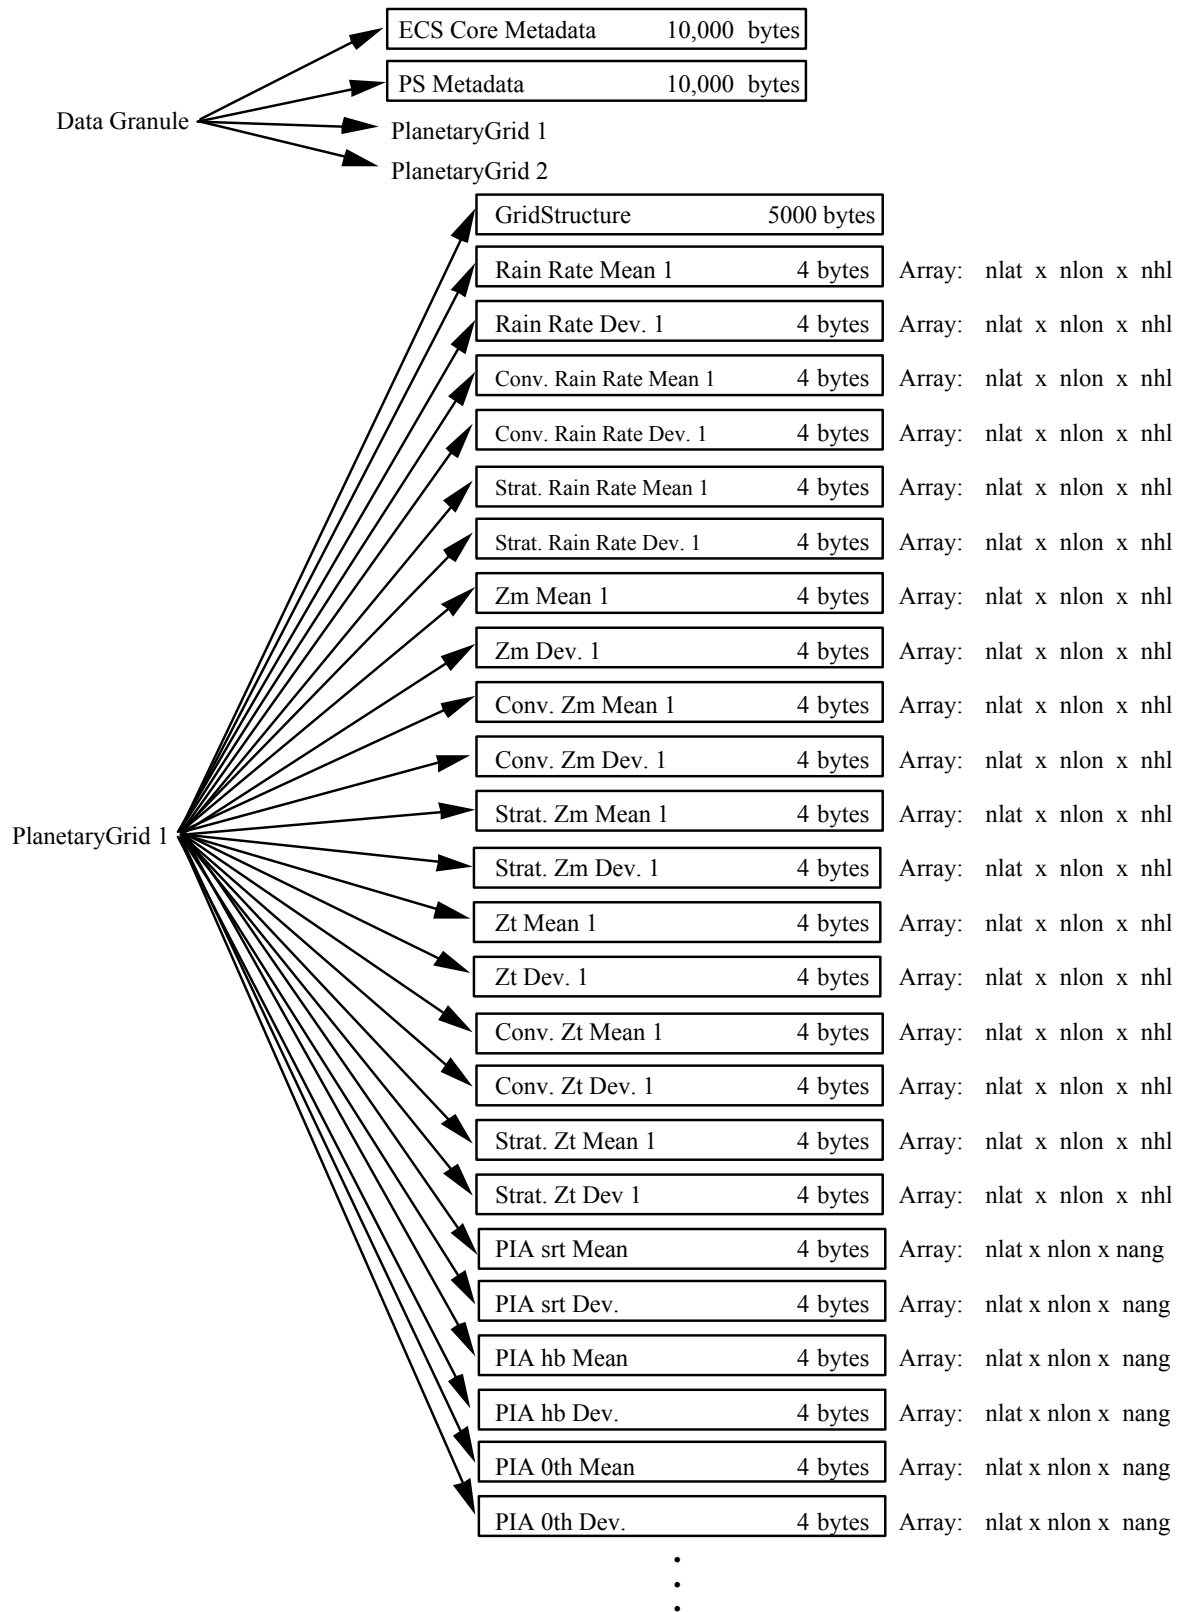


Continued on next page

**Figure 2.2.1-1 Data Format Structure for 3A-25, PR Rainfall**



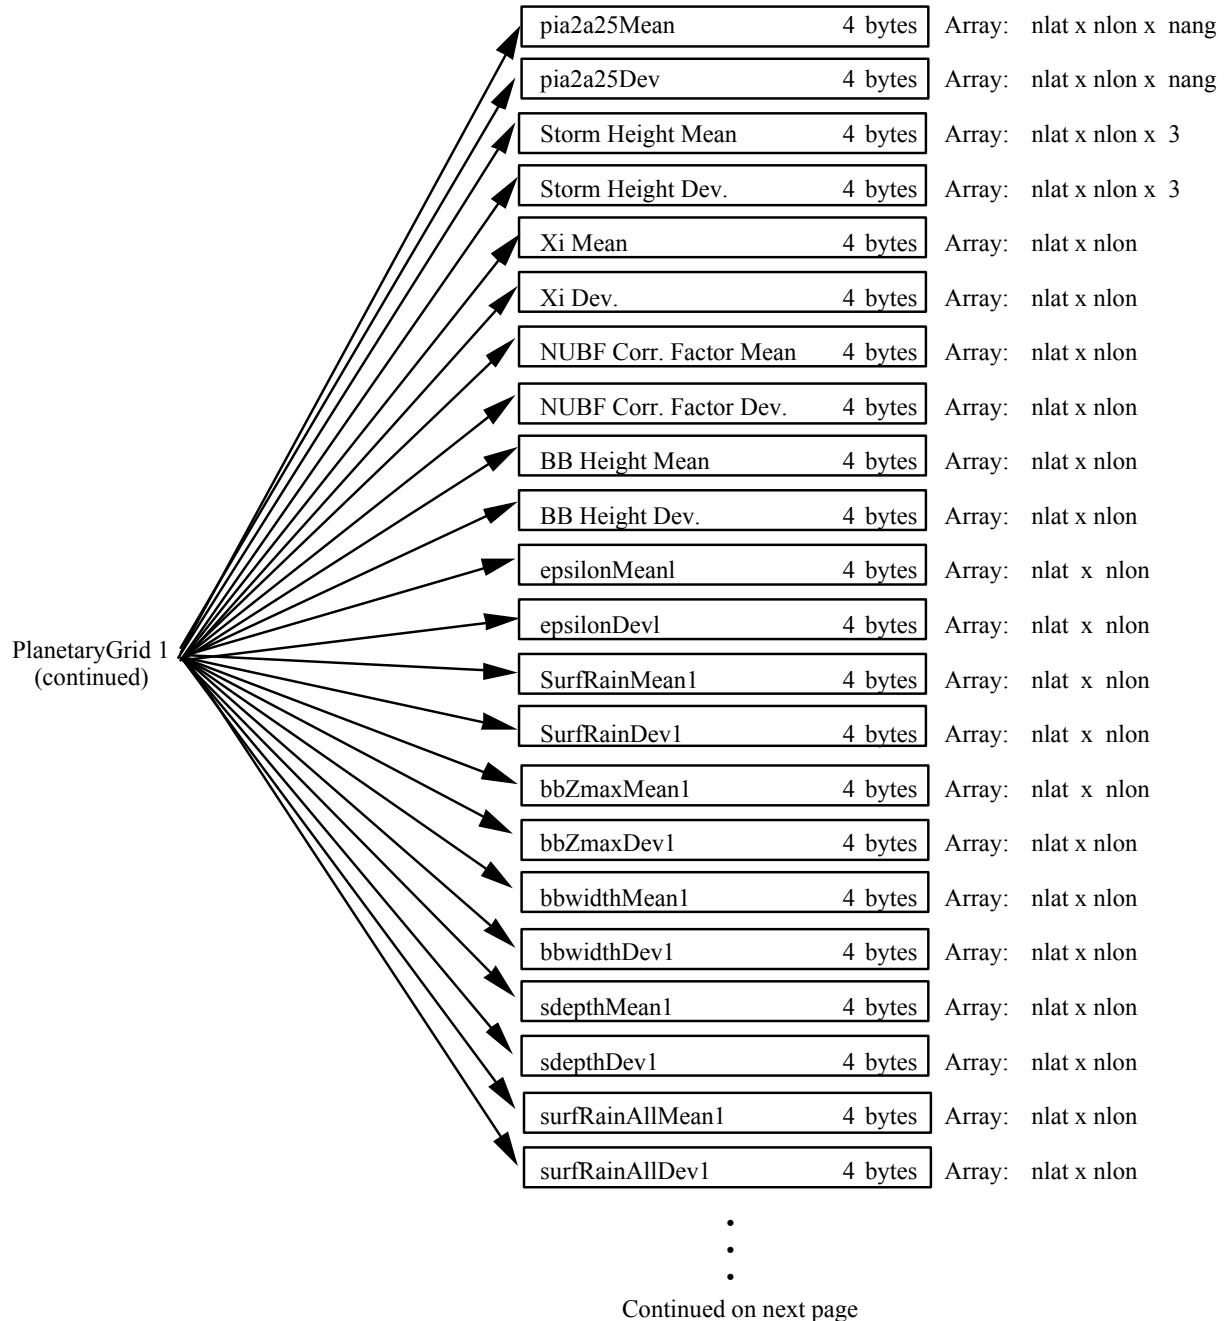


**Figure 2.2.1-1**  
**Data Format Structure for 3A-25, PR Rainfall (continued)**

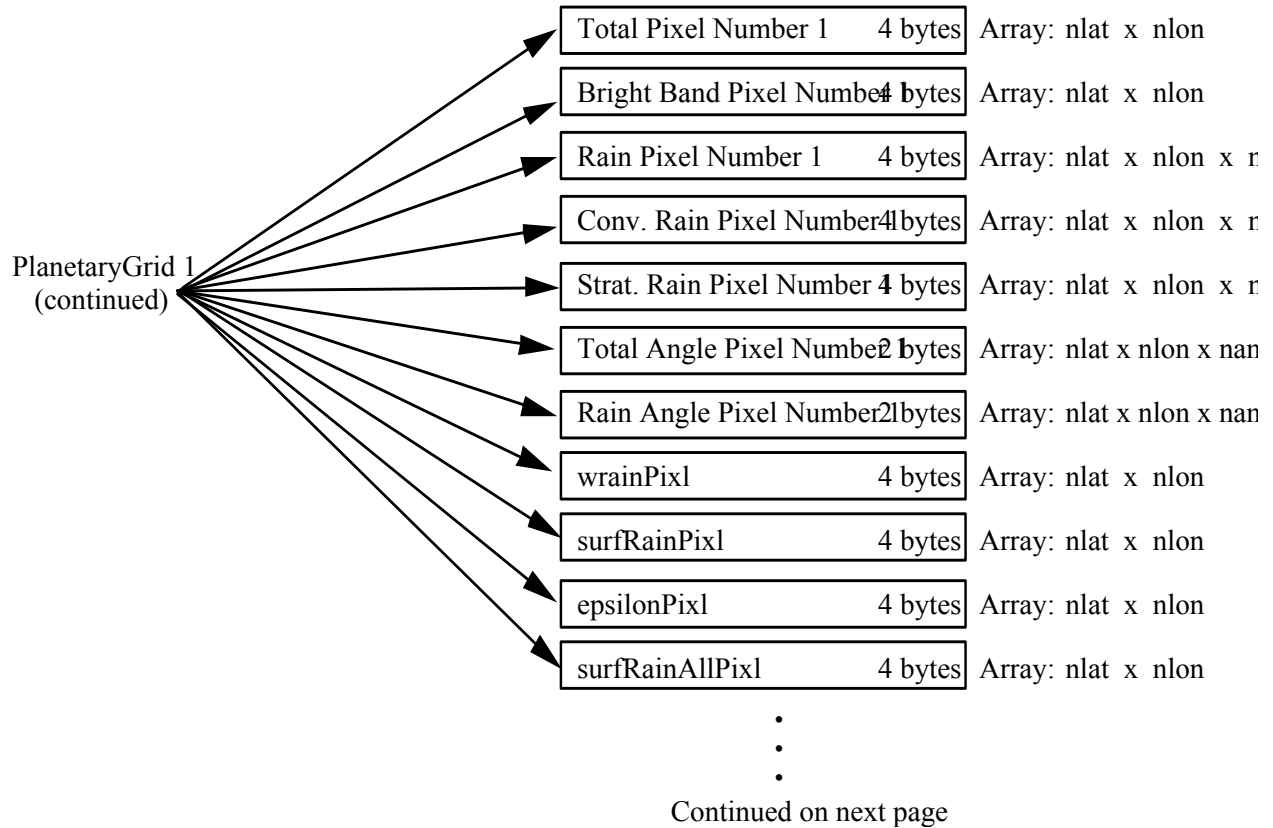


**Figure 2.2.1-1**  
**Data Format Structure for 3A-25, PR Rainfall (continued)**



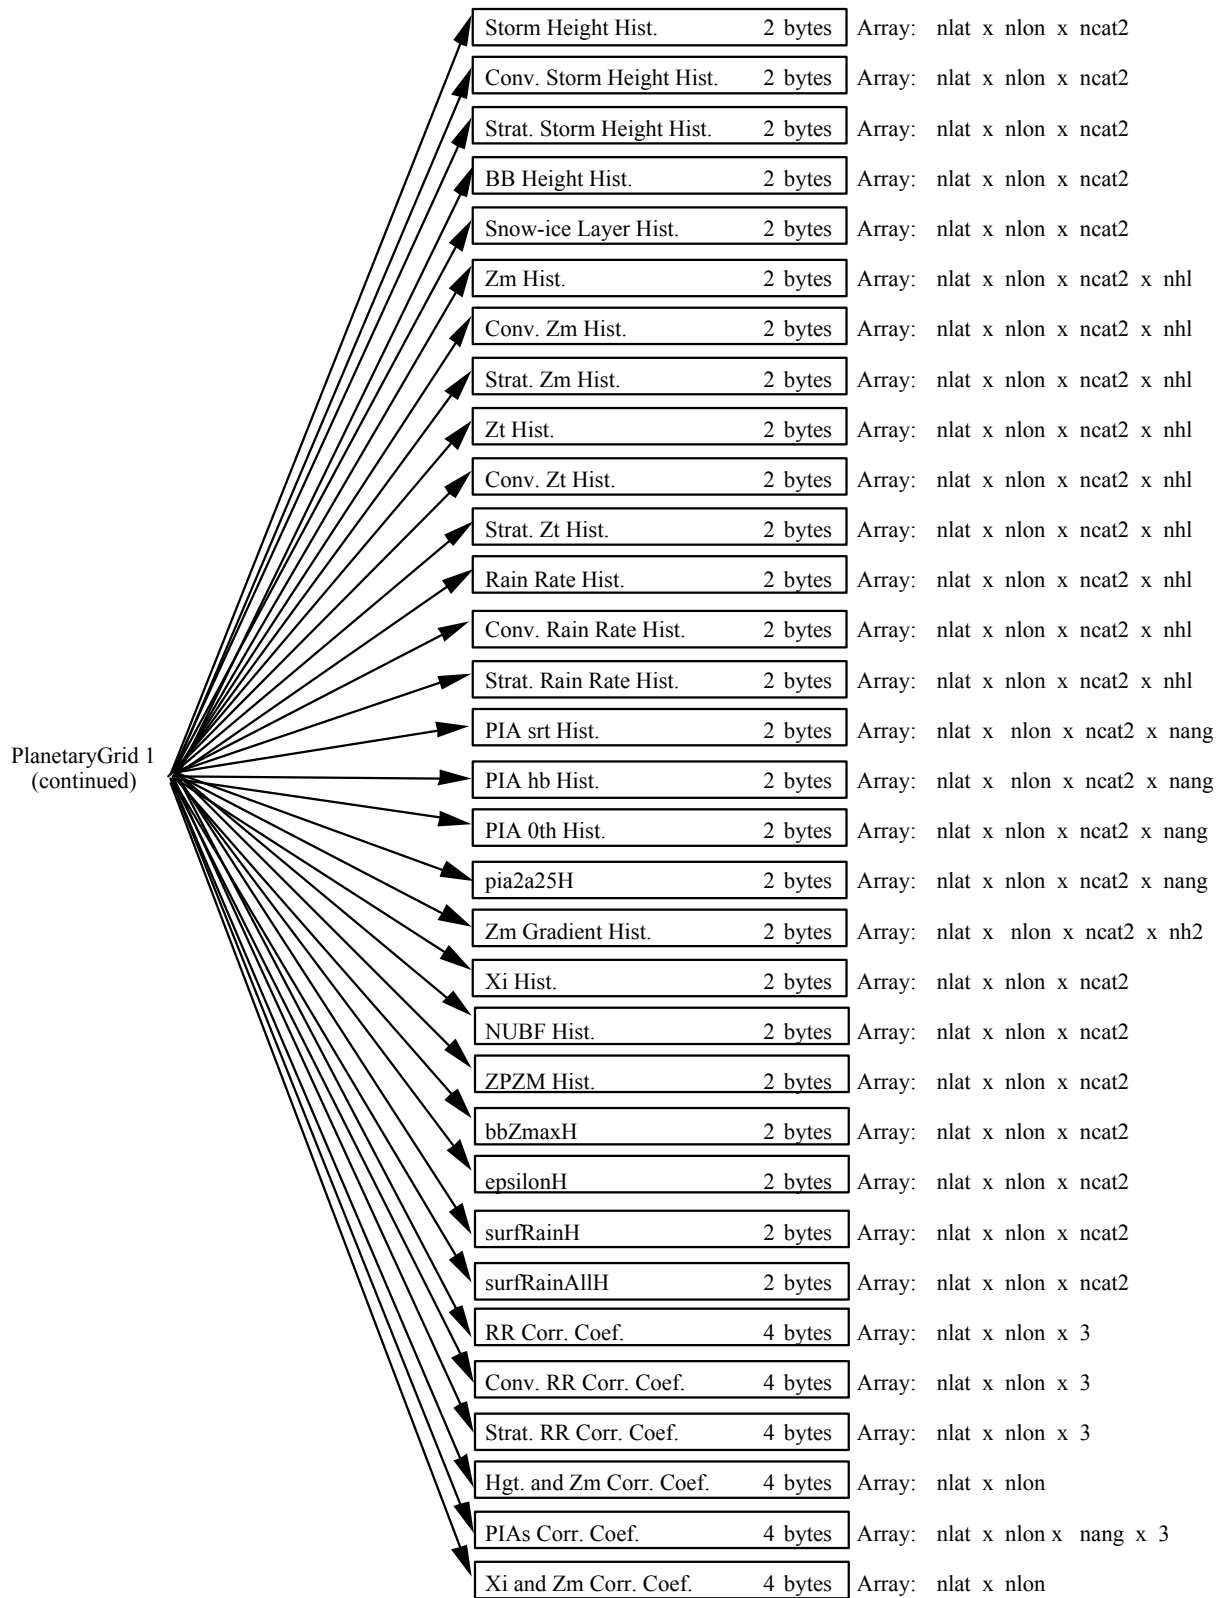

**Figure 2.2.1-1 (continued) Data Format Structure for 3A-25, PR Rainfall**

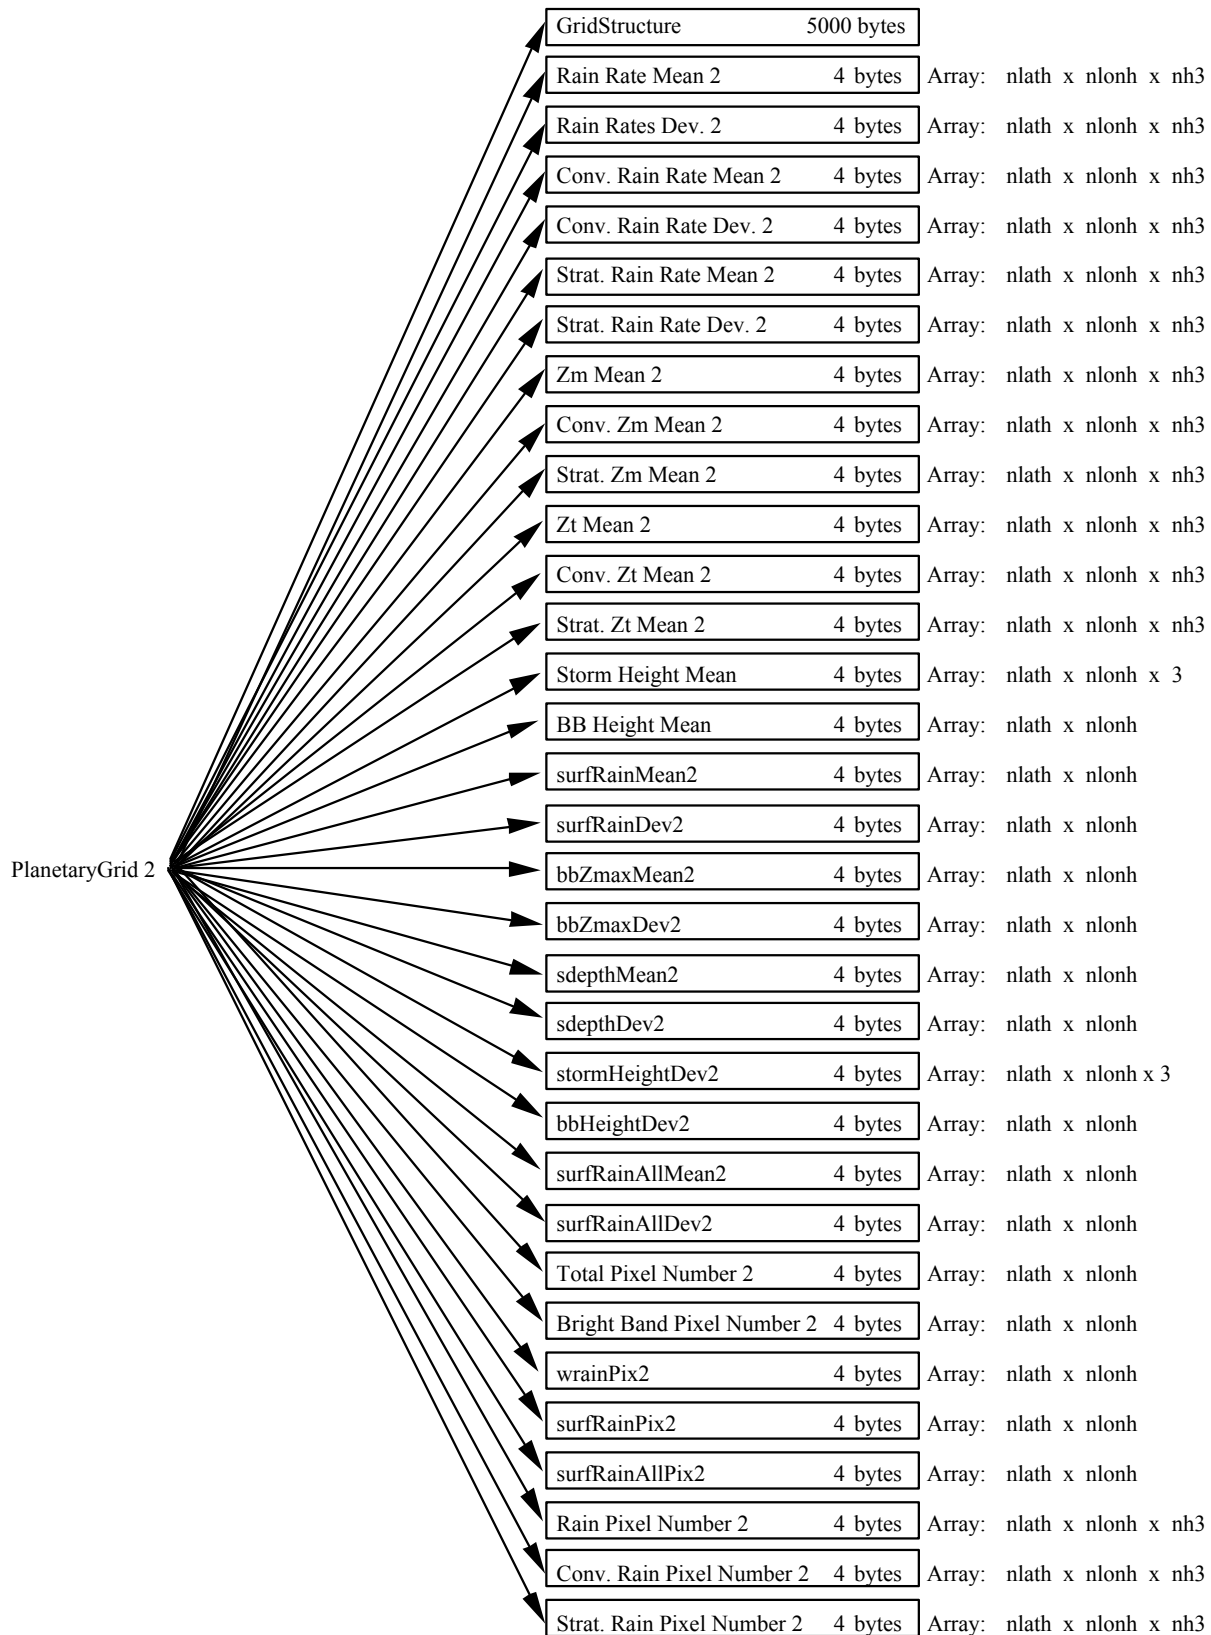

**Figure 2.2.1-1 (continued) Data Format Structure for 3A-25, PR Rainfall**

**Strat. Rain Rates Dev. 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

Strat. Rain Rates Dev. 1 gives standard deviations of non-zero rain rates for stratiform rain over  $5^\circ \times 5^\circ$  boxes for one month. The rain rates are determined in 2A-25 and evaluated for path-average and at the fixed heights of 2, 4, 6, 10 and 15 km. It ranges from 0.0 to 3000.0 mm/h.

**Zm Mean 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

The Zm Mean 1 gives means of measured radar reflectivity at the fixed heights of 2, 4, 6, 10 and 15 km and for path-average over  $5^\circ \times 5^\circ$  boxes for one month using data from 1C-21. It ranges from 0 to 100 dBZ.

**Zm Dev.1** (SDS, array size nlat x nlon x nh1, 4-byte float):

The Zm Dev. 1 gives standard deviations of measured radar reflectivity at the fixed heights of 2, 4, 6, 10 and 15 km and for path-average over  $5^\circ \times 5^\circ$  boxes for one month using data from 1C-21. It ranges from 0 to 100 dBZ.

**Conv. Zm Mean 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

Conv. Zm Mean 1 gives the monthly means of measured radar reflectivity for convective rain at a horizontal resolution of  $5^\circ \times 5^\circ$ . The path-averaged mean and means at the fixed heights of 2, 4, 6, 10 and 15 km are calculated using data from 1C-21. It ranges from 0 to 100 dBZ.

**Conv. Zm Dev. 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

Conv. Zm Dev. 1 gives the monthly standard deviations of measured radar reflectivity for convective rain at a horizontal resolution of  $5^\circ \times 5^\circ$ . The path-averaged standard deviation and those at the fixed heights of 2, 4, 6, 10 and 15 km are calculated using data from 1C-21. It ranges from 0 to 100 dBZ.

**Strat. Zm Mean 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

Strat. Zm Mean 1 gives the monthly means of measured radar reflectivity for stratiform rain at a horizontal resolution of  $5^\circ \times 5^\circ$ . The path-averaged mean and means at the fixed heights of 2, 4, 6, 10 and 15 km are calculated using data from 1C-21. It ranges from 0 to 100 dBZ.

**Strat. Zm Dev. 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

Strat. Zm Dev. 1 gives the monthly standard deviations of measured radar reflectivity for stratiform rain at a horizontal resolution of  $5^\circ \times 5^\circ$ . The path-averaged standard deviation and those at the fixed heights of 2, 4, 6, 10 and 15 km are calculated using data from 1C-21. It ranges from 0 to 100 dBZ.

**Zt Mean 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

The Zt Mean 1 gives means of corrected radar reflectivity factors at the fixed heights of 2, 4, 6, 10 and 15 km and for path-average over  $5^\circ \times 5^\circ$  boxes for one month using data from 2A-25. It ranges from 0.1 to 80 dBZ.

**Zt Dev. 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

The Zt Dev. 1 gives standard deviations of corrected radar reflectivity factors at the fixed heights of 2, 4, 6, 10 and 15 km and for path-average over  $5^\circ \times 5^\circ$  boxes for one month using data from 2A-25. It ranges from 0.0 to 80 dBZ.

**Conv. Zt Mean 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

Conv. Zt Mean 1 gives the monthly means of corrected radar reflectivity for convective rain at a horizontal resolution of  $5^\circ \times 5^\circ$ . The path-averaged mean and means at the fixed heights of 2, 4, 6, 10 and 15 km are calculated using data from 2A-25. It ranges from 0.1 to 80 dBZ.

**Conv. Zt Dev. 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

Conv. Zt Dev. 1 gives the monthly standard deviations of corrected radar reflectivity for convective rain at a horizontal resolution of  $5^\circ \times 5^\circ$ . The path-averaged standard deviation and those at the fixed heights of 2, 4, 6, 10 and 15 km are calculated using data from 2A-25. It ranges from 0.0 to 80 dBZ.

**Strat. Zt Mean 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

Strat. Zt Mean 1 gives the monthly means of measured radar reflectivity for stratiform rain at a horizontal resolution of  $5^\circ \times 5^\circ$ . The path-averaged mean and means at the fixed heights of 2, 4, 6, 10 and 15 km are calculated using data from 2A-25. It ranges from 0.1 to 80 dBZ.

**Strat. Zt Dev. 1** (SDS, array size nlat x nlon x nh1, 4-byte float):

Strat. Zt Dev. 1 gives the monthly standard deviations of corrected radar reflectivity for stratiform rain at a horizontal resolution of  $5^\circ \times 5^\circ$ . The path-averaged standard deviation and those at the fixed heights of 2, 4, 6, 10 and 15 km are calculated using data from 2A-25. It ranges from 0.0 to 80.0 dBZ.

**PIA srt Mean** (SDS, array size nlat x nlon x nang, 4-byte float):

PIA srt Mean gives the monthly means of SRT (surface reference technique) path-integrated attenuation calculated at four fixed incidence angles. It has a horizontal resolution of  $5^\circ \times 5^\circ$ . It has units of dB and a range from 0 dB to 100 dB.

**PIA srt Dev.** (SDS, array size nlat x nlon x nang, 4-byte float):

PIA srt Dev. gives the monthly standard deviation of SRT path-integrated attenuation calculated at four fixed incidence angles. It has a horizontal resolution of  $5^\circ \times 5^\circ$ . It has units of dB and a range from 0 dB to 100 dB.

**PIA hb Mean** (SDS, array size nlat x nlon x nang, 4-byte float):

PIA hb Mean gives the monthly means of HB path-integrated attenuation calculated at four fixed incidence angles. It has a horizontal resolution of  $5^\circ \times 5^\circ$ . It has units of dB and a range from 0 dB to 100 dB.

**PIA hb Dev.** (SDS, array size nlat x nlon x nang, 4-byte float):

PIA hb Dev. gives the monthly standard deviation of HB path-integrated attenuation calculated at four fixed incidence angles. It has a horizontal resolution of  $5^\circ \times 5^\circ$ . It has units of and a range from 0 dB to 100 dB.

**PIA 0th Mean** (SDS, array size nlat x nlon x nang, 4-byte float):

PIA 0th Mean gives the monthly means of the 0th-order path-integrated attenuation calculated at four fixed incidence angles. It has a horizontal resolution of  $5^\circ \times 5^\circ$ . It has units of and a range from 0 dB to 100 dB.

**PIA 0th Dev.** (SDS, array size nlat x nlon x nang, 4-byte float):

PIA 0th Dev. gives the monthly standard deviation of the 0th-order path-integrated attenuation calculated at four fixed incidence angles. It has a horizontal resolution of  $5^\circ \times 5^\circ$ . It has units of dB and a range from 0 dB to 100 dB.

**pia2a25Mean** (SDS, array size nlat x nlon x nang, 4-byte float):

pia2a25Mean gives the monthly means of 2A25 path-integrated attenuation calculated at four fixed incidence angles. It has a horizontal resolution of  $5^\circ \times 5^\circ$ . It has units of dB and a range from 0 dB to 100 dB.

**pia2a25Dev.** (SDS, array size nlat x nlon x nang, 4-byte float):

pia2a25Dev. gives the monthly standard deviation of 2A25 path-integrated attenuation calculated at four fixed incidence angles. It has a horizontal resolution of  $5^\circ \times 5^\circ$ . It has units of and a range from 0 dB to 100 dB.

**Storm Height Mean** (SDS, array size nlat x nlon x 3, 4-byte float):

Storm Height Mean is the mean of the storm height for conditions of stratiform rain, convective rain and unconditional rain. It has units of meters and ranges from 0.0 to 20,000.

**Storm Height Dev.** (SDS, array size nlat x nlon x 3, 4-byte float):

Storm Height Dev. is the standard deviation of the storm height for conditions of stratiform rain, convective rain and unconditional rain. It has units of meters and ranges from 0.0 to 20,000.

**Xi Mean** (SDS, array size nlat x nlon, 4-byte float):

Xi Mean gives the monthly means of the horizontal non-uniformity parameter of the rain field within a ray at a horizontal resolution of  $5^\circ \times 5^\circ$ . It has no units and ranges from 0.0 to 99.0.

**Xi Dev.** (SDS, array size nlat x nlon, 4-byte float):

Xi Dev. gives the monthly standard deviation of the horizontal non-uniformity parameter of the rain field within a ray at a horizontal resolution of  $5^\circ \times 5^\circ$ . It has no units and ranges from 0.0 to 99.0.



**NUBF Correction Factor Mean** (SDS, array size nlat x nlon, 4-byte float):

The NUBF (Non-Uniform Beam Filling) Correction Factor Mean gives the monthly mean of NUBF correction for Z-factor and Rain Rate at a horizontal resolution of  $5^\circ \times 5^\circ$ . It has no units and a range of 0 to 2.0.

**NUBF Correction Factor Dev.** (SDS, array size nlat x nlon, 4-byte float):

The NUBF (Non-Uniform Beam Filling) Correction Factor Dev. gives the monthly standard deviation of the NUBF correction for Z-factor and Rain Rate at a horizontal resolution of  $5^\circ \times 5^\circ$ . It has no units and ranges from 0 to 2.0.

**BB Height Mean** (SDS, array size nlat x nlon, 4-byte float):

BB Height Mean gives the monthly means of the bright band height at a horizontal resolution of  $5^\circ \times 5^\circ$ . It has units of meters and ranges from 0 to 20,000.

**BB Height Dev.** (SDS, array size nlat x nlon, 4-byte float):

BB Height Dev. gives the monthly deviation of the bright band height at a horizontal resolution of  $5^\circ \times 5^\circ$ . It has units of meters and ranges from 0 to 20,000.

**epsilonMean1** (SDS, array size nlat x nlon, 4-byte float):

Mean of epsilon conditioned on use of SRT in 2A21 at a horizontal resolution of  $5^\circ \times 5^\circ$ . It ranges from 0.0 to 3.0 (unitless).

**epsilonDev1** (SDS, array size nlat x nlon, 4-byte float):

Standard deviation of epsilon conditioned on use of SRT in 2A21 at a horizontal resolution of  $5^\circ \times 5^\circ$ . It ranges from 0.0 to 3.0 (unitless).

**surfRainMean1** (SDS, array size nlat x nlon, 4-byte float):

Mean of non-zero near-surface rain rate at a horizontal resolution of  $5^\circ \times 5^\circ$ . It ranges from 0.0 to 3000.0 mm/h.

**surfRainDev1** (SDS, array size nlat x nlon, 4-byte float):

Standard deviation of non-zero near-surface rain rate at a horizontal resolution of  $5^\circ \times 5^\circ$ . It ranges from 0.0 to 3000.0 mm/h.

**bbZmaxMean1** (SDS, array size nlat x nlon, 4-byte float):

Mean of maximum reflectivity in bright band at a horizontal resolution of  $5^\circ \times 5^\circ$ . It ranges from 0.0 to 100.0 dBZ.

**bbZmaxDev1** (SDS, array size nlat x nlon, 4-byte float):

Standard Deviation of maximum reflectivity in bright band at a horizontal resolution of  $5^\circ \times 5^\circ$ . It ranges from 0.0 to 100.0 dBZ.

**bbwidthMean1** (SDS, array size nlat x nlon, 4-byte float):

Mean of width of bright band at a horizontal resolution of  $5^\circ \times 5^\circ$ . It ranges from 0.0 to 20,000.0 m.

**bbwidthDev1** (SDS, array size nlat x nlon, 4-byte float):

Standard deviation of width of bright band at a horizontal resolution of  $5^\circ \times 5^\circ$ . It ranges from 0.0 to 20,000.0 m.

**sdepthMean1** (SDS, array size nlat x nlon, 4-byte float):

Mean of snow depth at a horizontal resolution of  $5^\circ \times 5^\circ$ . It ranges from 0.0 to 20,000.0 m.

**sdepthDev1** (SDS, array size nlat x nlon, 4-byte float):

Standard deviation of snow depth at a horizontal resolution of  $5^\circ \times 5^\circ$ . It ranges from 0.0 to 20,000.0 m.

**surfRainAllMean1** (SDS, array size nlat x nlon, 4-byte float):

Mean of non-zero near-surface rain rate using rain certain and rain possible at a horizontal resolution of  $5^\circ \times 5^\circ$ . It ranges from 0.0 to 3,000.0 mm/h.

**surfRainAllDev1** (SDS, array size nlat x nlon, 4-byte float):

Standard deviation of non-zero near-surface rain rate using rain certain and rain possible at a horizontal resolution of  $5^\circ \times 5^\circ$ . It ranges from 0.0 to 3,000.0 mm/h.

**Total Pixel Number 1** (SDS, array size nlat x nlon, 4-byte integer):

The Total Pixel Number 1 is the number of total pixels over  $5^\circ \times 5^\circ$  boxes for one month. The range is 0 to 2,000,000.

**Bright Band Pixel Number 1** (SDS, array size nlat x nlon, 4-byte integer):

The number of bright band counts over each  $5^\circ \times 5^\circ$  box for one month. The range is 0 to 2,000,000.

**Rain Pixel Number 1** (SDS, array size nlat x nlon x nh1, 4-byte integer):

The Rain Pixel Number 1 is the number of non-zero rain rate pixels at the fixed heights of 2, 4, 6, 10 and 15 km and for path-average over  $5^\circ \times 5^\circ$  boxes for one month. The range is 0 to 2,000,000.

**Conv. Rain Pixel Number 1** (SDS, array size nlat x nlon x nh1, 4-byte integer):

The Convective Rain Pixel Number 1 is the number of non-zero rain rate pixels for convective rain at the fixed heights of 2, 4, 6, 10 and 15 km and for path-average over  $5^\circ \times 5^\circ$  boxes for one month. The range is 0 to 2,000,000.

**Strat. Rain Pixel Number 1** (SDS, array size nlat x nlon x nh1, 4-byte integer):

The Stratiform Rain Pixel Number 1 is the number of non-zero rain rate pixels for stratiform rain at the fixed heights of 2, 4, 6, 10 and 15 km and for path-average over  $5^\circ \times 5^\circ$  boxes for one month. The range is 0 to 2,000,000.

**Total Angle Pixel Number 1** (SDS, array size nlat x nlon x nang, 2-byte integer):

Total Angle Pixel Number 1 is the total number of pixels over each 5° x 5° latitude-longitude grid box for a month. This parameter is accumulated at four different angles (i.e., 0°, 5°, 10°, and 15°). The range is 0 to 30,000.

**Rain Angle Pixel Number 1** (SDS, array size nlat x nlon x nang, 2-byte integer):

Rain Angle Pixel Number 1 is the total number of non-zero rain rate pixels over each 5° x 5° latitude-longitude grid box for a month. This parameter is accumulated at four different angles (i.e., 0°, 5°, 10°, and 15°). The range is 0 to 30,000.

**wrainPix1** (SDS, array size nlat x nlon, 4-byte integer):

Warm rain counts at a horizontal resolution of 5° x 5°. It ranges from 0 to 2,000,000.

**surfRainPix1** (SDS, array size nlat x nlon, 4-byte integer):

Near-surface rain counts at a horizontal resolution of 5° x 5°. It ranges from 0 to 2,000,000.

**epsilonPix1** (SDS, array size nlat x nlon, 4-byte integer):

Counts for epsilon when SRT value of PIA is used at a horizontal resolution of 5° x 5°. It ranges from 0 to 2,000,000.

**surfRainAllPix1** (SDS, array size nlat x nlon, 4-byte integer):

Number of counts of non-zero near-surface rain rate using rain certain and rain possible at a horizontal resolution of 5° x 5°. It ranges from 0 to 2,000,000.

**Storm Height Hist.** (SDS, array size nlat x nlon x ncat2, 2-byte integer):

These are histograms of the 'effective' storm heights for 30 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**Conv. Storm Height Hist.** (SDS, array size nlat x nlon x ncat2, 2-byte integer):

These are histograms of the 'effective' storm heights for convective rain for 30 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**Strat. Storm Height Hist.** (SDS, array size nlat x nlon x ncat2, 2-byte integer):

These are histograms of the 'effective' storm heights for stratiform rain for 30 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**BB Height Hist.** (SDS, array size nlat x nlon x ncat2, 2-byte integer):

These are histograms of the bright-band heights for 30 categories over a 5° x 5° box for one month, given that the bright band is detected. It ranges from 0 to 32,767.

**Snow-ice Layer Hist.** (SDS, array size nlat x nlon x ncat2, 2-byte integer):

These are histograms of the depth of snow-ice layer for 30 categories over a 5° x 5° box for one month. The depth of snow-ice layer is defined as the difference between effective storm height and estimated height of 0°C isotherm. It ranges from 0 to 32,767.

**Zm Hist.** (SDS, array size nlat x nlon x ncat2 x nh1, 2-byte integer):

The Zm Histograms are histograms of measured reflectivities of rain pixels at five heights (2, 4, 6, 10 and 15 km) and path-average for 20 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**Conv. Zm Hist.** (SDS, array size nlat x nlon x ncat2 x nh1, 2-byte integer):

The Convective Zm Histograms are histograms of measured reflectivities of convective rain pixels at five heights (2, 4, 6, 10 and 15 km) and path-average for 20 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**Strat. Zm Hist.** (SDS, array size nlat x nlon x ncat2 x nh1, 2-byte integer):

The Stratiform Zm Histograms are histograms of measured reflectivities of stratiform rain pixels at five heights (2, 4, 6, 10 and 15 km) and path-average for 20 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**Zt Hist.** (SDS, array size nlat x nlon x ncat2 x nh1, 2-byte integer):

The Zt Histograms are histograms of corrected reflectivity factors for rain pixels at five heights (2, 4, 6, 10 and 15 km) and path-average for 20 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**Conv. Zt Hist.** (SDS, array size nlat x nlon x ncat2 x nh1, 2-byte integer):

The Convective Zt Histograms are histograms of corrected reflectivity factors for convective rain pixels at five heights (2, 4, 6, 10 and 15 km) and path-average for 20 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**Strat. Zt Hist.** (SDS, array size nlat x nlon x ncat2 x nh1, 2-byte integer):

The Stratiform Zt Histograms are histograms of corrected reflectivity factors for stratiform rain pixels at five heights (2, 4, 6, 10 and 15 km) and path-average for 20 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**Rain Rate Hist.** (SDS, array size nlat x nlon x ncat2 x nh1, 2-byte integer):

These are histograms of non-zero rain rate pixels at five heights (2, 4, 6, 10 and 15 km) and path-average for 20 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**Conv. Rain Rate Hist.** (SDS, array size nlat x nlon x ncat2 x nh1, 2-byte integer):

These are histograms of non-zero rain rate pixels for convective rain at five heights (2, 4, 6, 10 and 15 km) and path-average for 20 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**Strat. Rain Rate Hist.** (SDS, array size nlat x nlon x ncat2 x nh1, 2-byte integer):

These are histograms of non-zero rain rate pixels for stratiform rain at five heights (2, 4, 6, 10 and 15 km) and path-average for 20 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**PIA srt Hist.** (SDS, array size nlat x nlon x ncat2 x nang, 2-byte integer):

PIA srt Hist. gives histograms of path-attenuation as determined by the surface reference technique (SRT) at 4 incidence angles (0, 5, 10 and 15°) for 30 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**PIA hb Hist.** (SDS, array size nlat x nlon x ncat2 x nang, 2-byte integer):

These are histograms of path-attenuation using an estimate derived from measured reflectivity ( $Z_m$ ) and a k-Z relationship at 4 incidence angles (0, 5, 10 and 15°) for 30 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**PIA 0th Hist.** (SDS, array size nlat x nlon x ncat2 x nang, 2-byte integer):

PIA 0th Hist. is the histogram of the 0th order path-integrated attenuation with a horizontal resolution of 5° x 5°. This histogram is calculated for 30 categories at 4 different incident angles (0°, 5°, 10° and 15°). It ranges from 0 to 32,767.

**pia2A25H** (SDS, array size nlat x nlon x ncat2 x nang, 2-byte integer):

These are histograms of path-attenuation as determined by 2A25 at 4 incidence angles (0, 5, 10 and 15°) for 30 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**Zm Gradient Hist.** (SDS, array size nlat x nlon x ncat2 x nh2, 2-byte integer):

These are histograms of the vertical gradient in measured reflectivity at 3 levels for 30 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**Xi Hist.** (SDS, array size nlat x nlon x ncat2, 2-byte integer):

The Xi Histograms is the histogram of non-uniformity parameter determined in 2A-25 for 30 categories over a 5° x 5° box for one month. It ranges from 0 to 32,767.

**NUBF Hist.** (SDS, array nlat x nlon x ncat2, 2-byte integer):

NUBF (Non-Uniform Beam Filling) Hist. gives the histogram of the NUBF correction for Z-factor and rain rate of 30 different categories over 5° x 5° grid boxes. It ranges from 0 to 32,767.

**ZPZM Hist.** (SDS, array nlat x nlon x ncat2, 2-byte integer):

ZPZM Hist. is the histogram of the difference between the reflectivity at two heights: (Bright Band - Epsilon) and (Bright Band + Epsilon). This histogram is calculated for 30 different categories at each grid box of 5° x 5°. It ranges from 0 to 32,767.

**bbZmaxH** (SDS, array size nlat x nlon x ncat2, 2-byte integer):

Histogram of maximum  $Z_t$  in bright band at a horizontal resolution of 5° x 5°. It ranges from 0 to 32,000.

**epsilonH** (SDS, array size nlat x nlon x ncat2, 2-byte integer):

Histogram of epsilon conditioned on use of SRT in 2A25 at a horizontal resolution of 5° x 5°. It ranges from 0 to 32,000.

**surfRainH** (SDS, array size nlat x nlon x ncat2, 2-byte integer):

Histogram of near-surface rain rate at a horizontal resolution of  $5^\circ \times 5^\circ$ . It ranges from 0 to 32,000.

**surfRainAllH** (SDS, array size nlat x nlon x ncat2, 2-byte integer):

Histogram of near-surface rain rate using rain certain and rain possible at a horizontal resolution of  $5^\circ \times 5^\circ$ . It ranges from 0 to 32,000.

**RR Corr. Coef.** (SDS, array size nlat x nlon x 3, 4-byte float):

These are correlation coefficients of non-zero rain rates between 3 heights (i.e., correlation coefficient of rain rates at 2 km vs 4 km, 2 km vs 6 km, and 4 km vs 6 km) for a  $5^\circ \times 5^\circ$  box for one month. They are calculated under convective condition, stratiform condition or both. It ranges from -1.000 to 1.000.

**Conv. RR Corr. Coef.** (SDS, array size nlat x nlon x 3, 4-byte float):

These are correlation coefficients of non-zero rain rates for convective rain between 3 heights (i.e., correlation coefficient of rain rates at 2 km vs 4 km, 2 km vs 6 km, and 4 km vs 6 km) for a  $5^\circ \times 5^\circ$  box for one month. It ranges from -1.000 to 1.000.

**Strat. RR Corr. Coef.** (SDS, array size nlat x nlon x 3, 4-byte float):

These are correlation coefficients of non-zero rain rates for stratiform rain between 3 heights (i.e., correlation coefficient of rain rates at 2 km vs 4 km, 2 km vs 6 km, and 4 km vs 6 km) for a  $5^\circ \times 5^\circ$  box for one month. It ranges from -1.000 to 1.000.

**Hgt. and Zm Corr. Coef.** (SDS, array size nlat x nlon, 4-byte float):

This is the correlation coefficient between the storm height and the maximum measured reflectivity factor along the path for a  $5^\circ \times 5^\circ$  box for one month. It ranges from -1.000 to 1.000.

**PIAs Corr. Coef.** (SDS, array size nlat x nlon x nang x 3, 4-byte float):

This is the correlation coefficient of three path-integrated attenuations (SRT, HB, and 0th order PIAs) at angles of  $0^\circ$ ,  $5^\circ$ ,  $10^\circ$  and  $15^\circ$  for a  $5^\circ \times 5^\circ$  box for one month. It ranges from -1.000 to 1.000.

**Xi and Zm Corr. Coef.** (SDS, array size nlat x nlon, 4-byte float):

This is the correlation coefficient between the non-uniformity and the maximum measured reflectivity factor along the path for a  $5^\circ \times 5^\circ$  box for one month. It ranges from -1.000 to 1.000.

**GridStructure** (Attribute, 5000-byte character):

GridStructure gives the specification of the geometry of the grids in Planetary Grid 2. See Section 2 in Volume 3 of ICS, Level 1 File Specifications.

**Rain Rate Mean 2** (SDS, array size nlat x nlonh x nh3, 4-byte float):

Rain Rate Mean 2 gives means of non-zero rain rates over  $0.5^\circ \times 0.5^\circ$  boxes for one month. The rain rates are determined in 2A-25 and evaluated at the fixed heights of 2 km, 4 km, 6 km, and path average. It ranges from 0 to 3000.0 mm/h.

**Rain Rate Dev. 2** (SDS, array size nlatx x nlonh x nh3, 4-byte float):

Rain Rate Dev. 2 gives standard deviations of non-zero rain rates over  $0.5^\circ \times 0.5^\circ$  boxes for one month. The rain rates are determined in 2A-25 and evaluated at the fixed heights of 2 km, 4 km, 6 km, and path average. It ranges from 0 to 3000.0 mm/h.

**Conv. Rain Rate Mean 2** (SDS, array size nlatx x nlonh x nh3, 4-byte float):

Conv. Rain Rate Mean 2 gives means of non-zero rain rates for convective rain over  $0.5^\circ \times 0.5^\circ$  boxes for one month. The rain rates are determined in 2A-25 and evaluated at the fixed heights of 2 km, 4 km, 6 km, and path average. It ranges from 0 to 3000.0 mm/h.

**Conv. Rain Rate Dev. 2** (SDS, array size nlatx x nlonh x nh3, 4-byte float):

Conv. Rain Rate Dev. 2 gives standard deviations of non-zero rain rates for convective rain over  $0.5^\circ \times 0.5^\circ$  boxes for one month. The rain rates are determined in 2A-25 and evaluated at the fixed heights of 2 km, 4 km, 6 km, and path average. It ranges from 0 to 3000.0 mm/h.

**Strat. Rain Rate Mean 2** (SDS, array size nlatx x nlonh x nh3, 4-byte float):

Strat. Rain Rate Mean 2 gives means of non-zero rain rates for stratiform rain over  $0.5^\circ \times 0.5^\circ$  boxes for one month. The rain rates are determined in 2A-25 and evaluated at the fixed heights of 2 km, 4 km, 6 km, and path average. It ranges from 0 to 3000.0 mm/h.

**Strat. Rain Rate Dev. 2** (SDS, array size nlatx x nlonh x nh3, 4-byte float):

Strat/ Rain Rate Dev. 2 gives standard deviations of non-zero rain rates for stratiform rain over  $0.5^\circ \times 0.5^\circ$  boxes for one month. The rain rates are determined in 2A-25 and evaluated at the fixed heights of 2 km, 4 km, 6 km, and path average. It ranges from 0 to 3000.0 mm/h.

**Zm Mean 2** (SDS, array nlatx x nlonh x nh3, 4-byte float):

Zm Mean 2 gives the monthly means of the measured reflectivity at the fixed height levels of 2 km, 4 km, 6 km, and path average over  $0.5^\circ \times 0.5^\circ$  grid boxes. It ranges from -20 to 80 dBZ.

**Conv. Zm Mean 2** (SDS, array nlatx x nlonh x nh3, 4-byte float):

Conv. Zm Mean 2 gives the monthly means of the measured reflectivity of convective rain at the fixed height levels of 2 km, 4 km, 6 km, and path average over  $0.5^\circ \times 0.5^\circ$  grid boxes. It ranges from -20 to 80 dBZ.

**Strat. Zm Mean 2** (SDS, array nlatx x nlonh x nh3, 4-byte float):

Strat. Zm Means gives the monthly means of the measured reflectivity of stratiform rain at the fixed heights of 2 km, 4 km, 6 km, and path average over  $0.5^\circ \times 0.5^\circ$  grid boxes. It ranges from -20 to 80 dBZ.

**Zt Mean 2** (SDS, array nlatx x nlonh x nh3, 4-byte float):

Zt Mean 2 gives the monthly means of the corrected reflectivity at the fixed heights of 2 km, 4 km, 6 km, and path average over  $0.5^\circ \times 0.5^\circ$  grid boxes. It ranges from 0.1 to 80 dBZ.

**Conv. Zt Mean 2** (SDS, array nlath x nlonh x nh3, 4-byte float):

Conv. Zm Mean 2 gives the monthly means of the corrected reflectivity of convective rain at the fixed height levels of 2 km, 4 km, 6 km, and path average over  $0.5^\circ \times 0.5^\circ$  grid boxes. It ranges from 0.1 to 80 dBZ.

**Strat. Zt Mean 2** (SDS, array nlath x nlonh x nh3, 4-byte float):

Strat. Zm Means gives the monthly means of the corrected reflectivity of stratiform rain at the fixed heights of 2 km, 4 km, 6 km, and path average over  $0.5^\circ \times 0.5^\circ$  grid boxes. It ranges from 0.1 to 80 dBZ.

**Storm Height Mean** (SDS, array nlath x nlonh x 3, 4-byte float):

Storm Height Mean gives the monthly means of the storm height, unconditioned and conditioned for stratiform and convective rain over  $0.5^\circ \times 0.5^\circ$  grid boxes. It has units of meters and ranges from 0 to 20,000.

**BB Height Mean** (SDS, array nlath x nlonh, 4-byte float):

BB Height Mean gives the monthly means of bright-band height over grid boxes of  $0.5^\circ \times 0.5^\circ$ . It has units of meters and ranges from 0 to 20,000.

**surfRainMean2** (SDS, array size nlath x nlonh, 4-byte float):

Mean of non-zero near-surface rain rate at a horizontal resolution of  $0.5^\circ \times 0.5^\circ$ . It ranges from 0.0 to 3000.0 mm/h.

**surfRainDev2** (SDS, array size nlath x nlonh, 4-byte float):

Standard Deviation of non-zero near-surface rain rate at a horizontal resolution of  $0.5^\circ \times 0.5^\circ$ . It ranges from 0.0 to 3000.0 mm/h.

**bbZmaxMean2** (SDS, array size nlath x nlonh, 4-byte float):

Mean of maximum reflectivity in bright band at a horizontal resolution of  $0.5^\circ \times 0.5^\circ$ . It ranges from 0.0 to 100.0 dBZ.

**bbZmaxDev2** (SDS, array size nlath x nlonh, 4-byte float):

Mean of maximum reflectivity in bright band at a horizontal resolution of  $0.5^\circ \times 0.5^\circ$ . It ranges from 0.0 to 100.0 dBZ.

**sdepthMean2** (SDS, array size nlath x nlonh, 4-byte float):

Mean of snow depth at a horizontal resolution of  $0.5^\circ \times 0.5^\circ$ . It ranges from 0.0 to 20,000.0 m.

**sdepthDev2** (SDS, array size nlath x nlonh, 4-byte float):

Standard deviation of snow depth at a horizontal resolution of  $0.5^\circ \times 0.5^\circ$ . It ranges from 0.0 to 20,000.0 m.

**stormHeightDev2** (SDS, array size nlath x nlonh x 3, 4-byte float):

Standard deviation of storm height at a horizontal resolution of  $0.5^\circ \times 0.5^\circ$ . It ranges from 0.0 to 20,000.0 m.



**bbHeightDev2** (SDS, array size nlat x nlon, 4-byte float):

Standard deviation of bright band height at a horizontal resolution of  $0.5^\circ \times 0.5^\circ$ . It ranges from 0.0 to 20,000.0 m.

**surfRainAllMean2** (SDS, array size nlat x nlon, 4-byte float):

Mean of non-zero near-surface rain rate using rain certain and rain possible at a horizontal resolution of  $0.5^\circ \times 0.5^\circ$ . It ranges from 0.0 to 3,000.0 mm/h.

**surfRainAllDev2** (SDS, array size nlat x nlon, 4-byte float):

Standard deviation of non-zero near-surface rain rate using rain certain and rain possible at a horizontal resolution of  $0.5^\circ \times 0.5^\circ$ . It ranges from 0.0 to 3,000.0 mm/h.

**Total Pixel Number 2** (SDS, array size nlat x nlon, 4-byte integer):

The Total Pixel Number 2 is the number of total pixels over  $0.5^\circ \times 0.5^\circ$  boxes for one month. The range is 0 to 2,000,000.

**Bright Band Pixel Number 2** (SDS, array size nlat x nlon, 4-byte integer):

The number of bright band counts over each  $0.5^\circ \times 0.5^\circ$  box for one month. The range is 0 to 2,000,000.

**wrainPix2** (SDS, array size nlat x nlon, 4-byte integer):

Warm rain counts at a horizontal resolution of  $0.5^\circ \times 0.5^\circ$ . It ranges from 0 to 2,000,000,000.

**surfRainPix2** (SDS, array size nlat x nlon, 4-byte integer):

Near-surface rain counts at a horizontal resolution of  $0.5^\circ \times 0.5^\circ$ . It ranges from 0 to 2,000,000,000.

**surfRainAllPix2** (SDS, array size nlat x nlon, 4-byte integer):

Near-surface rain counts using rain certain and rain possible at a horizontal resolution of  $0.5^\circ \times 0.5^\circ$ . It ranges from 0 to 2,000,000,000.

**Rain Pixel Number 2** (SDS, array size nlat x nlon x nh3, 4-byte integer):

The Rain Pixel Number 2 is the monthly number of non-zero rain rate pixels for path-averaged rainfall and rainfall at the fixed heights of 2 km, 4 km, 6 km, and path average over  $0.5^\circ \times 0.5^\circ$  boxes. The range is 0 to 2,000,000.

**Conv. Rain Pixel Number 2** (SDS, array size nlat x nlon x nh3, 4-byte integer):


The Convective Rain Pixel Number 2 is the number of non-zero rain rate pixels for convective rain at the fixed heights of 2 km, 4 km, 6 km, and path average over  $0.5^\circ \times 0.5^\circ$  boxes for one month. The range is 0 to 2,000,000.

**Strat. Rain Pixel Number 2** (SDS, array size nlat x nlonh x nh3, 4-byte integer):

The Stratiform Rain Pixel Number 2 is the number of non-zero rain rate pixels for stratiform rain at the fixed heights of 2 km, 4 km, 6 km, and path average over 0.5° x 0.5° boxes for one month. The range is 0 to 2,000,000.

### 2.2.2 3A-26 - Surface Rain

3A-26, “Surface Rain”, computes the distribution of rainfall on a 5° x 5° grid on a monthly basis. The output products are calculated at three fixed heights (2, 4, and 6 km) and for the path-averaged rain rates. 3A-26 will also compute fitting parameters for cumulative probability functions of rain rate as a function of 20 rain categories and 6 thresholds. Figure 2.2.2-1 shows the structure of the 3A-26 product in terms of the component objects and their sizes.

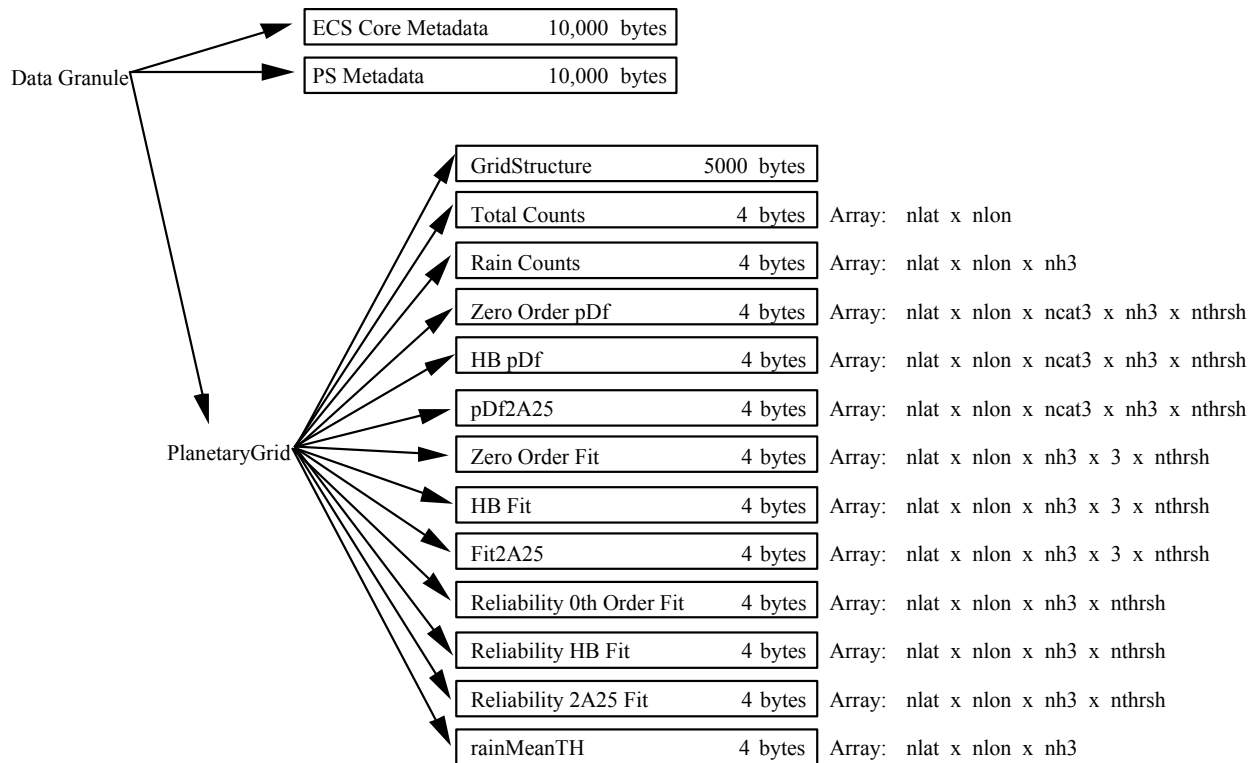

**Figure 2.2.2-1**  
**Data Format Structure for 3A-26, Surface Rainfall (See previous page).**

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**Grid Structure** (Vdata Table, 5000-byte character):

GridStructure gives the specification of the geometry of the grids. See Section 2 in Volume 3 of ICS, Level 1 File Specifications

**Total Counts** (SDS, array size nlat x nlon, 4-byte integer):

This is the total number of counts (measurements) per month at each 5° x 5° box. Ranges are 0 to 2,147,483,647.

**Rain Counts** (SDS, array size nlat x nlon x nh3, 4-byte integer):

Total number of rain counts per month at each 5° x 5° box. This is computed at 2 km, 4 km, 6 km, and for the path-average. Ranges are 0 to 2,147,483,647.

**Zero Order pDf** (SDS, array size nlat x nlon x ncat3 x nh3 x nthrsh, 4-byte integer):

Probability distribution function (cumulative) in counts of the zeroth order rain rate estimate at each 5° x 5° box. The pDf is computed at 2 km, 4 km, 6 km, and for the path average. Ranges are 0 to 2,147,483,647.

**HB pDf** (SDS, array size nlat x nlon x ncat3 x nh3 x nthrsh, 4-byte integer):

Probability distribution function (cumulative) in counts of the Hitschfield-Bordan (HB) rain rate estimate at each 5° x 5° box. The pDf is computed at 2 km, 4 km, 6 km, and for the path average. Ranges are 0 to 2,147,483,647.

**pDf2A25** (SDS, array size nlat x nlon x ncat3 x nh3 x nthrsh, 4-byte integer):

Probability distribution function (cumulative) in counts of the Surface Reference Technique (SRT) rain rate estimate at each 5° x 5° box. The pDf is computed at 2 km, 4 km, 6 km, and for the path average. Ranges are 0 to 2,147,483,647.

**Zero Order Fit** (SDS array size nlat x nlon x nh3 x 3 x nthrsh, 4-byte float):

The mean, variance and probability of rain parameters for the log-normal model obtained from the zeroth order pDf. Fitting parameters are given at 2 km, 4 km, 6 km, and for the path average. In addition, 5 thresholds are used. Ranges are **TBD**.

**HB Fit** (SDS array size nlat x nlon x nh3 x 3 x nthrsh, 4-byte float):

The 3 fitting parameters for the log-normal model obtained from the HB pDf. Fitting parameters are given at 2 km, 4 km, 6 km, and for the path average. In addition, 5 thresholds are used. Ranges are **TBD**.

**fit2A25** (SDS array size nlat x nlon x nh3 x 3 x nthrsh, 4-byte float):

The 3 fitting parameters for the log-normal model obtained from the SRT pDf. Fitting parameters are given at 2 km, 4 km, 6 km, and for the path average and 5 thresholds. Ranges are **TBD**.

**Reliability 0th Order Fit** (SDS array size nlat x nlon x nh3 x nthrsh, 4-byte float):  
Reliability parameter for the 0th order fit. Units and ranges are **TBD**.

**Reliability HB Fit** (SDS array size nlat x nlon x nh3 x nthrsh, 4-byte float):  
Reliability parameter for the HB fit. Units and ranges are **TBD**.

**Reliability 2A25 Fit** (SDS array size nlat x nlon x nh3 x nthrsh, 4-byte float):  
Reliability parameter for the SRT fit. Units and ranges are **TBD**.

**rainMeanTH** (SDS, array size nlat x nlon x nh3, 4-byte float):  
The mean monthly unconditioned rain rate (mm/h) as determined from the threshold method (in particular, it is determined from the fitting parameters for the '0th-order method' using a single 'Q' threshold for each height level). Range is 0.0 to 3000.0 mm/h.

## 2.3 TMI AND PR COMBINED

There is one Level 3 combined algorithm for TMI and PR, 3B-31 — Rainfall Combined (PI: Dr. Christian Kummerow). The granule size is one month. The following parameters are used in describing the formats:

- nlat: the number of 5° grid intervals of latitude from 40° N to 40° S (16).
- nlon: the number of 5° grid intervals of longitude 180°W to 180°E (72).
- nlayer: the number of profiling layers (14).

### 2.3.1 3B-31 - Rainfall Combined

3B-31, "Rainfall Combined", uses the high quality retrievals done for the narrow swath in 2B-31 to calibrate the wide swath retrievals generated in 2A-12. For each 5° x 5° latitude/longitude box and each vertical layer, an adjustment ratio will be calculated for the swath overlap region for one month. Figure 2.3.1-1 shows the structure of the 3B-31 product in terms of the component objects and their sizes.

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):  
ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):  
Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**GridStructure** (Attribute, 5000-byte character):  
GridStructure gives the specification of the geometry of the grids. See Section 2 in Volume 3 of ICS, Level 1 File Specifications.

**sfcrainTMI** (SDS, array size nlat x nlon, 4-byte float):


Surface rain from 2A12 accumulated in each 5° x 5° box. It ranges from 0.0 to 3000.0 mm.

**convect Rain** (SDS, array size nlat x nlon, 4-byte float):

Convective surface rain from 2A12 accumulated in each 5° x 5° box. It ranges from 0.0 to 3000.0 mm.

**cloudWater** (SDS, array size nlat x nlon x nlayer, 4-byte float):

Monthly mean cloud water from 2A12 at each vertical layer in each 5° x 5° box. It ranges from 0.0 to 10.0 g m<sup>-3</sup>.

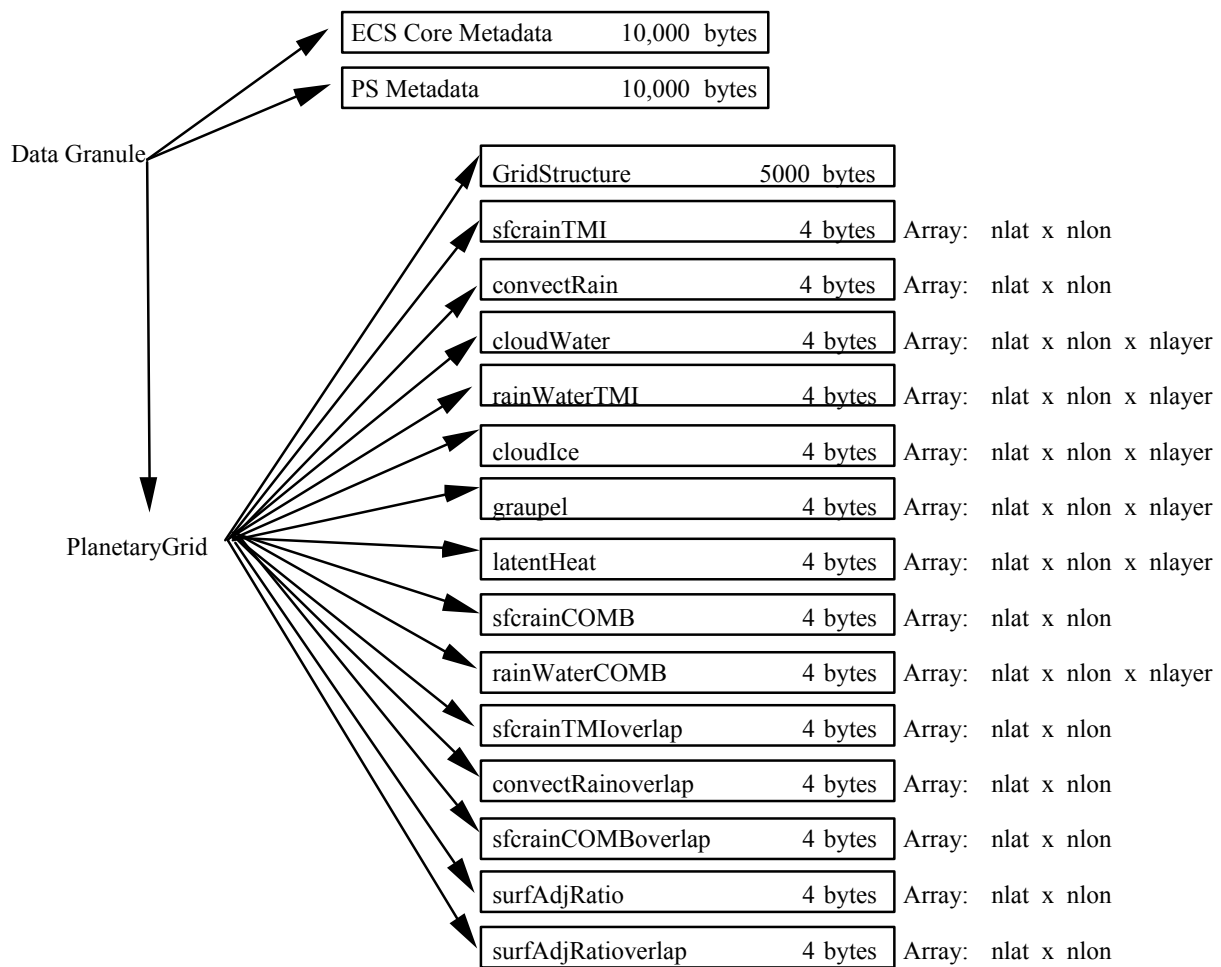

**Figure 2.3.1-1**  
**Data Format Structure for 3B-31, Rainfall Combined.**

**rainWaterTMI** (SDS, array size nlat x nlon x nlayer, 4-byte float):

Monthly mean rain water from 2A12 at each vertical layer in each 5° x 5° box. It ranges from 0.0 to 10.0 g m<sup>-3</sup>.

**cloudIce** (SDS, array size nlat x nlon x nlayer, 4-byte float):

Monthly mean cloud ice from 2A12 at each vertical layer in each 5° x 5° box. It ranges from 0.0 to 10.0 g m<sup>-3</sup>.

**graupel** (SDS, array size nlat x nlon x nlayer, 4-byte float):

Monthly mean graupel from 2A12 at each vertical layer in each 5° x 5°. It ranges from 0.0 to 10.0 g m<sup>-3</sup>.

**latentHeat** (SDS, array size nlat x nlon x nlayer, 4-byte float):

Monthly mean latent heating from 2A12 at each vertical layer in each 5° x 5° box. It ranges from -256 deg/hour to 256 deg/hour.

**sfcrainCOMB** (SDS, array size nlat x nlon, 4-byte float):

Surface rain from 2B31 accumulated in each 5° x 5° box. It ranges from 0.0 to 3000.0 mm.

**rainWaterCOMB** (SDS, array size nlat x nlon x nlayer, 4-byte float):

Rain water at each vertical layer from 2B31 accumulated in each 5° x 5° box. It ranges from 0.0 to 10.0 g m<sup>-3</sup>.

**sfcrainTMIoverlap** (SDS, array size nlat x nlon, 4-byte float):

Surface rain from 2A12 where 2A12 and 2B31 overlap accumulated in each 5° x 5° box. It ranges from 0.0 to 3000.0 mm.

**convectRainoverlap** (SDS, array size nlat x nlon, 4-byte float):

Convective surface rain from 2A12 where 2A12 and 2B31 overlap accumulated in each 5° x 5° box. It ranges from 0.0 to 3000.0 mm.

**sfcrainCOMBoverlap** (SDS, array size nlat x nlon, 4-byte float):

Surface rain from 2B31 where 2A12 and 2B31 overlap accumulated in each 5° x 5° box. It ranges from 0.0 to 3000.0 mm.

**surfAdjRatio** (SDS, array size nlat x nlon, 4-byte float):

The ratio of 2B31 to 2A12 surface rainfall, calculated from the swath overlap region for each 5° x 5° box.

**surfAdjRatiooverlap** (SDS, array size nlat x nlon, 4-byte float):

The ratio of 2B31 to 2A12 surface rainfall, calculated from the swath overlap region for each 5° x 5° box.


## 2.4 TRMM AND OTHERS COMBINED

There are two TRMM and Others Combined algorithms, 3B-42 — TRMM and Others-GPI Calibration (PI: Dr. Robert Adler and Dr. George Huffman), and 3B-43 — TRMM and Others Data Sources (PI: Dr. Robert Adler and Dr. George Huffman). The formats of these products are based on the Version 1 algorithm descriptions. The granule size is one day for 3B-42 and one month for 3B-43. The following parameters are used in describing the formats:

- nlat: the number of 1° grid intervals of latitude from 40° N to 40° S (80).
- nlon: the number of 1° grid intervals of longitude 180°W to 180°E (360).

### 2.4.1 3B-42 - TRMM and Others GPI Calibration

3B-42, “TRMM and Others GPI Calibration”, provides precipitation estimates in the TRMM regions that have the (nearly-zero) bias of the “TRMM Combined Instrument” precipitation estimate and the dense sampling of geosynchronous IR imagery. Figure 2.4.1-1 shows the structure of the 3B-42 product in terms of the component objects and their sizes.

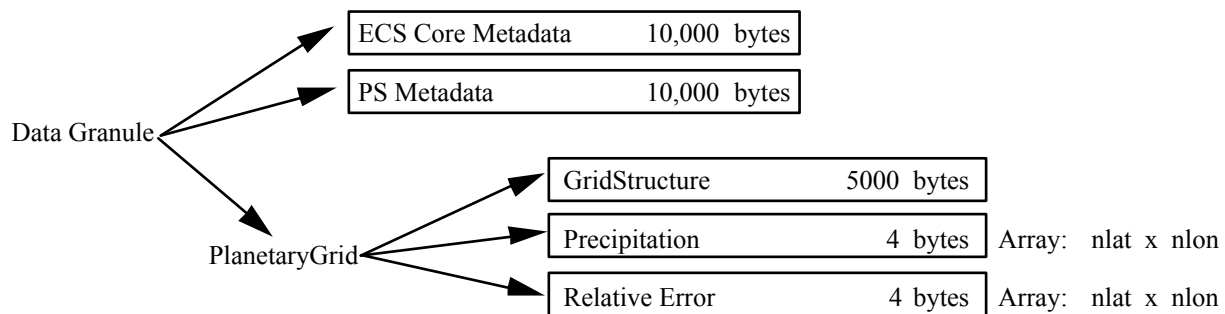

**Figure 2.4.1-1**  
**Data Format Structure for 3B-42, TRMM and Others GPI Calibration**

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**GridStructure** (Attribute, 5000-byte character):

GridStructure gives the specification of the geometry of the grids. See Section 2 in Volume 3 of ICS, Level 1 File Specifications

**Precipitation** (SDS, array size nlat x nlon, 4-byte float):


This is the adjusted GPI precipitation estimate at each 1° x 1° box. It ranges from 0.0 to 3.5 mm/hr.

**Relative Error** (SDS, array size nlat x nlon, 4-byte float):

This is the adjusted GPI relative error estimate at each 1° x 1° box. It ranges from 0.0 to 3.5 mm/hr.

### 2.4.2 3B-43 - TRMM and Others Data Sources

3B-43, “TRMM and Others Data Sources”, provides a “best” precipitation estimate in the TRMM region from all global data sources, namely TRMM, geosynchronous IR, and rain gauges. Figure 2.4.2-1 shows the structure of the 3B-43 product in terms of the component objects and their sizes.

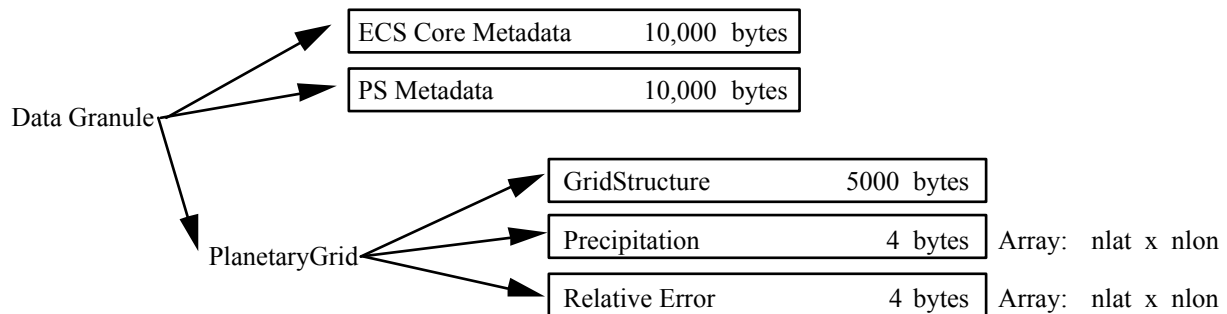

**Figure 2.4.2-1**  
**Data Format Structure for 3B-43, TRMM and Other Data Sources**

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**GridStructure** (Attribute, 5000-byte character):

GridStructure gives the specification of the geometry of the grids. See Section 2 in Volume 3 of ICS, Level 1 File Specifications



**Precipitation** (SDS, array size nlat x nlon, 4-byte float):

This is the satellite/gauge precipitation estimate at each 1° x 1° box for one month. It ranges from 0.0 to 3.5 mm/hr.

**Relative Error** (SDS, array size nlat x nlon, 4-byte float):

This is the satellite/gauge relative error estimate at each 1° x 1° box for one month. It ranges from 0.0 to 3.5 mm/hr.

## 2.5 GV RADAR

There are three Level 3A products for GV radar, 3A-53 — 5-Day Site Rainfall Map (Contact: Dr. Michael Biggerstaff), 3A-54 — Site Rainfall Map (Contact: Dr. Michael Biggerstaff) and 3A-55 — Monthly 3-D Structure (Contact: Dr. Michael Biggerstaff). The formats of these products are based on the Version 1 algorithm descriptions and consultation with GV radar algorithm scientists. The granule size is 5 days for 3A-53 and one month for 3A-54 and 3A-55. The following parameters are used in describing the format:

nx\_prod: the number of points in the x-dimension of a 3-D Cartesian grid; 151 for single radar sites; 363 for the multiple radar site in Texas and 257 for Florida multiple radar site;

ny\_prod: the number of points in the y-dimension of a 3-D Cartesian grid; 151 for single radar sites; 285 for the multiple radar site in Texas and 353 for Florida multiple radar site;


nz: the number of grid points in the z-dimension of a 3-D Cartesian grid; 13 for both single and multiple radar sites;

ncat: the number of categories for computing CFADs and vertical profiles. There are totally 12 categories (eg., stratiform precipitation, convective precipitation, water surface, and land, etc.) that are enumerated in each section where applicable;

nbin: the maximum number of reflectivity bins; this is 86 which will allow a reflectivity range of -15 to 70 dBZ incremented by 1 dBZ.

### 2.5.1 3A-53 - 5-Day Site Rain Map

3A-53, “5-Day Site Rain Map”, is a map of 5-day surface rain totals derived from the instantaneous rain rate maps (2A-53). The map is in Cartesian coordinates with a 2 km horizontal resolution. It covers an area of 300km x 300km at single radar sites while the area differs for the multiple radar sites - 724 km x 568 km at the Texas site and 512 km x 704 km at Florida site. It should be noted that this is not a simple accumulation of the instantaneous maps as gaps in the data must be factored into the calculation. Figure 2.5.1-1 shows the structure of the 3A-53 product in terms of the component objects and their sizes.

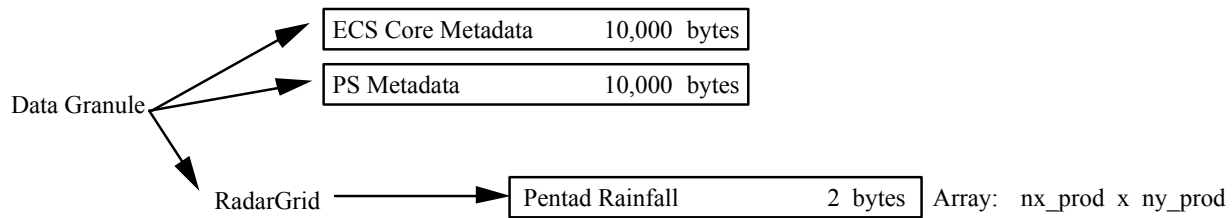

**Figure 2.5.1-1**  
**Data Format Structure for 3A-53, 5-Day Site Rain Map**

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):


Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**Pentad Rainfall** (SDS, array size  $nx\_prod \times ny\_prod$ , 2-byte integer):

Pentad Rainfall is a map of the 5-day rainfall totals as derived from the instantaneous rain rate maps. The maps are in Cartesian coordinates with a 2 km horizontal resolution. They cover a region of 300km x 300km at single radar sites while the covered area differs for the multiple radar sites (i.e., 724 km x 568 km at Texas site and 512 km x 704 km at Florida site). As mentioned previously, this is not a simple accumulation of the instantaneous maps due to the presence of gaps in the data. The method used to handle the gaps is still **TBD**. The rainfall ranges from 0.0 to 5,000.0 mm. It is multiplied by 10 and stored as a 2-byte integer.

### **2.5.2 3A-54 - Site Rainfall Map**

3A-54, “Site Rainfall Map”, is a map of monthly surface rain totals derived from the instantaneous rain rate maps (2A-53). The map is in Cartesian coordinates with a 2 km horizontal resolution and covers an area of 300km x 300km at single radar sites while the covered area varies for multiple radar sites - 724 km x 568 km at Texas site and 512 km x 704 km at Florida site. This monthly rainfall map is not a simple accumulation of the instantaneous maps as gaps in the data must be factored into the calculation. Figure 2.5.2-1 shows the structure of the 3A-54 product in terms of the component objects and their sizes.

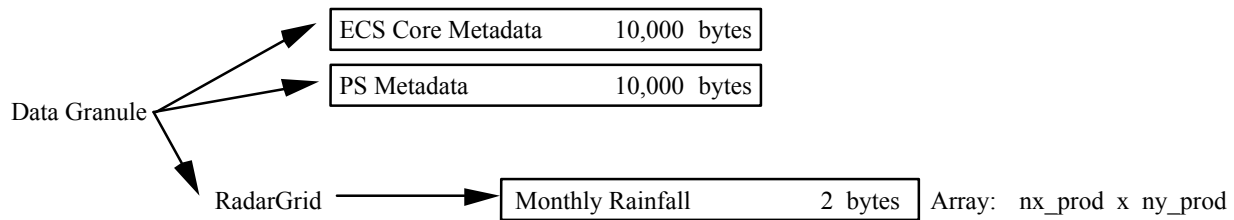

**Figure 2.5.2-1**  
**Data Format Structure for 3A-54, Site Rainfall Map.**

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):


Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**Monthly Rainfall** (SDS, array size nx\_prod x ny\_prod, 2-byte integer):

Monthly Rainfall is a map of the monthly rainfall totals as derived from the instantaneous rain rate maps. The maps are in Cartesian coordinates with a 2 km horizontal resolution and cover an area of 300 km x 300 km at single radar sites, 724 km x 568 km at Texas multiple radar site and 512 km x 704 km at Florida multiple radar site. This monthly rainfall map is not a simple accumulation of the instantaneous maps due to the presence of gaps in the data. The method used to handle the gaps is still **TBD**. The rainfall ranges from 0 to 10,000 mm.

**2.5.3 3A-55 - Monthly 3-D Structure**

3A-55, “Monthly 3-D Structure”, provides radar site monthly 3-D structure information obtained from 2A-55. Figure 2.5.3-1 shows the structure of the 3A-55 product in terms of the component objects and their sizes.

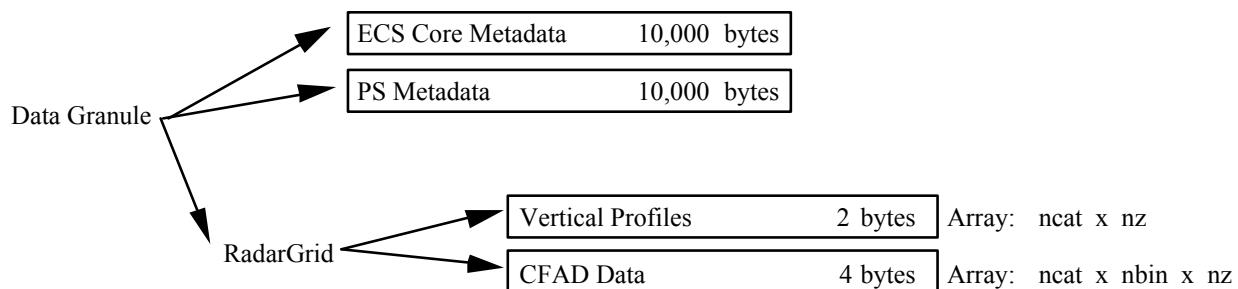

**Figure 2.5.3-1**  
**Data Format Structure for 3A-55, Monthly 3-D Structure.**

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**Vertical Profiles** (SDS, array size ncat x nz, 2-byte integer):

The vertical profiles are computed at each analysis level for a month for the following categories:

- 1) total;
- 2) total over land;
- 3) total over sea;
- 4) convective;
- 5) convective over land;
- 6) convective over sea;
- 7) stratiform;
- 8) stratiform over land;
- 9) stratiform over sea;
- 10) “anvil” (Anvil is defined as echo aloft with no contribution to surface rain.);
- 11) “anvil” over land;
- 12) “anvil” over sea.

Values range from -15.00 to 70.00 dBZ and are multiplied by 100 and stored as 2-byte integers.

**CFAD Data** (SDS, array size ncat x nbin x nz, 4-byte integer):

The CFAD Data are the number of pixels counted in specified height-reflectivity bin pairs for the 12 categories listed below for a month of radar data. Values range from 0 to 68,403,000 (3,000 radar volumes/month x 151 x 151) for single radar sites and from 0 to 310,365,000 (3,000 x 363 x 285) for Texas multiple radar site, from 0 to 272,163,000 (3,000 x 257 x 353) for Florida multiple radar site. The 12 categories are:

- 1) total;
- 2) total over land;
- 3) total over sea;
- 4) convective;

- 5) convective over land;
- 6) convective over sea;
- 7) stratiform;
- 8) stratiform over land;
- 9) stratiform over sea;
- 10) “anvil” (Anvil is defined as echo aloft with no contribution to surface rain.);
- 11) “anvil” over land;
- 12) “anvil” over sea.


## 2.6 OTHER VALIDATION DATA

There are 4 other Level 3 validation data products. Of those, only 3A-46 — SSM/I Rain (PI: Dr. Robert Adler, Dr. George Huffman) will be used by TSDIS for data processing. The granule size is one month. The following parameters are used in describing the formats:

- nlat: the number of 1.0° grid intervals of latitude from 90° N to 90° S (180).
- nlon: the number of 1.0° grid intervals of longitude (360).

### 2.6.1 3A-46 - SSM/I Rain

3A-46, “SSM/I Rain”, produces a 1.0° x 1.0° monthly rainfall map using SSM/I data. Figure 2.6.1-1 shows the structure of the 3A-46 product in terms of the component objects and sizes.

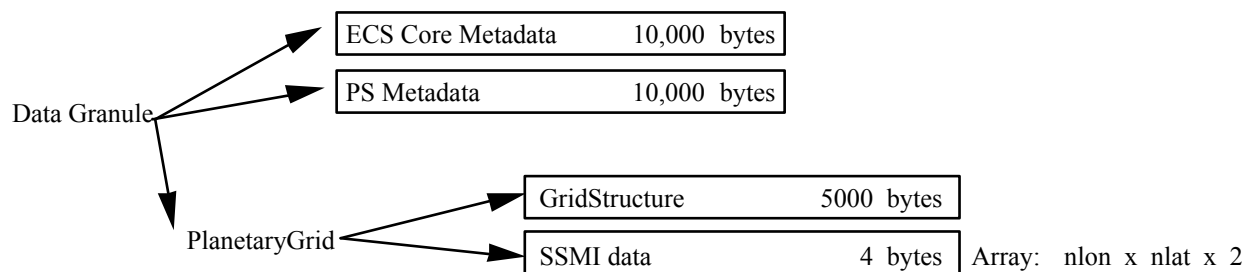

**Figure 2.6.1-1**  
**Data Format Structure for 3A-46, SSM/I Rain.**

The contents of objects in the structure are as follows:

**ECS Core Metadata** (Attribute, 10,000-byte character):

ECS Core Metadata are metadata useful to most products stored at EOSDIS. See Section 1 in Volume 6 of ICS, Metadata for TRMM Products.

**PS Metadata** (Attribute, 10,000-byte character):

Product Specific Metadata are metadata defined by and specific to TSDIS. See Section 2 in Volume 6 of ICS, Metadata for TRMM Products.

**GridStructure** (Attribute, 5000-byte character):

GridStructure gives the specification of the geometry of the grids. See Section 2 in Volume 3 of ICS, Level 1 File Specifications. Exceptions to the values in Section 2 are noted in Table 2.6.1-1.

**Table 2.6.1-1  
 3A-46 GridStructure Fields**

Name	Value
Latitude Resolution	1
Longitude Resolution	1
North Bounding Coordinate	90
South Bounding Coordinate	-90
West Bounding Coordinate	0
East Bounding Coordinate	360
Origin	"NORTHWEST"

**SSMIData** (SDS, array size nlon x nlat x 2, 4-byte float):

SSMI data averaged over 1° x 1° grid boxes and one month. The first variable is Precipitation Rate (mm/hr); the range is 0 to 100. The second variable is Number of Observations; the range is 0 to one billion. Note that the grids in SSMIData are different than the standard TSDIS grids in the following ways:

- 1) The longitude dimension precedes the latitude dimension.
- 2) The longitude index begins at the Greenwich meridian.
- 3) The latitude index begins at the northernmost row.
- 4) The latitude range is -90 to +90.

### 3. ACRONYMS

#### **C**

CA Closest Approach  
CAMS Climate Assessment and Monitoring System  
CFAD Contoured Frequency by Altitude Diagram

#### **D**

DMSP Defense Meteorological Satellite Program

#### **E**

ECS EOSDIS Core System  
EOSDIS Earth Observing System Data and Information System

#### **F**

FOV Field of View

#### **G**

GOES Geostationary Operational Environmental Satellite  
GPCC Global Precipitation Climatological Center  
GPCP Global Precipitation Climatological Project  
GPI GOES Precipitation Index  
GV Ground Validation

#### **H**

HB Hitschfeld Bordan Technique

#### **I**

ICS Interface Control Specification  
IFOV Instantaneous Field of View

#### **N**

NUBF Non-Uniform Beam Filling

#### **P**

PI Principal Investigator  
PIA Path Integrated Attenuation  
PR Precipitation Radar  
PS Product Specific

#### **R**

RR Rain Rate

**S**

SDS Science Data Set

SRT Surface Reference Technique

SSM/I Special Sensor Microwave/Imager

**T**

TBD To Be Determined

TMI TRMM Microwave Imager

TRMM Tropical Rainfall Measuring Mission

TSDIS TRMM Science Data and Information System

TSU TSDIS Science Users

**U**

UTC Universal Time Coordinated

**V**

VIRS Visible and Infrared Scanner



#### **4. GLOSSARY**

Convective rain	Precipitation from a convective cloud with extensive vertical development.
Disdrometer	Equipment designed to measure and record the size distribution of raindrops.
Earth Ellipsoid	An imaginary surface of the earth in the shape of an ellipsoid that coincides with the Mean Sea Level.
Geoid	An imaginary surface of the earth that coincides with Mean Sea Level over oceans and is extended through continents.
Granule	The amount of information contained in one data file (e.g., one orbit for some satellite data or one hour for some ground validation data).
Graupel	Compact precipitating ice, smaller than hail.
Isotherm	A contour of equal or constant temperature.
Metadata	Information which describes a data set (e.g., date recorded, source, or purpose).
Nadir	The point on the earth directly below the satellite.
Planetary Grid Structure	An EOSDIS defined structure in HDF to store data organized in one of the planetary grids defined by EOSDIS.
Radar Grid Structure	A user defined structure in HDF to store data organized in a grid with constant distance spacing on the surface of the earth.
Radar Structure	A user defined structure in HDF to store data organized in original ground radar spherical geometry.
Scan	A single sweep of a sensor onboard a satellite
Stratiform rain	Precipitation from a stratiform cloud with extensive horizontal development.
Swath Structure	An EOSDIS defined structure in HDF to store data organized by scans.
Vdata	An HDF object that is a table of records.

Vgroup	An HDF group of objects or other Vgroups.
Z-R relationship	A relationship between radar reflectivity ( $Z$ in $\text{mm}^6/\text{m}^3$ ) and rain rate ( $R$ in $\text{mm}/\text{hr}$ )